



**firesafe**  
fire safety equipment

**FSDG2 & FSDG4**

**dualguard+**



## 2 - 4 ZONE 2-WIRE FIRE CONTROL PANELS



FSDG2 & FSDG4


- 2 or 4 zones
- False alarm management mode
- Approved to EN54-2 & 4
- 3 year warranty
- Fire & fault relays
- One man walk test
- Non latching zones
- Class change inputs

Available with 2 or 4 zones, dualguard+ is the entry level panel from Firesafe but still has plenty to offer!

Available with 2 or 4 zones, with an array of engineering options including Two Wire setting by DIL switch, programmable zones & outputs, false alarm management mode, non latching zones and class change input the dualguard+ is the most dynamic entry level fire panel on the market today. The display uses super bright, clearly labelled LED indicators and the colour coded buttons give the end user the confidence to correctly manage their fire alarm system.



### 2 - 4 ZONE 2-WIRE FIRE CONTROL PANELS

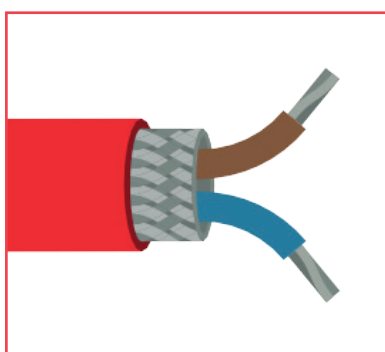

#### Two Wire Mode

Two Wire mode saves up to 40% in installation costs by allowing audio visual devices to be connected to the same pair of cables as the detectors & call points. Two Wire mode requires 'dualguard+' detector bases & call points.



Simple programming using the four numbered key pad buttons

#### Programming Features

- Non latching zones
- Short circuit as alarm zones
- False alarm management mode
- Sounder circuit function programming
- Disable zones, sndr ccts & aux

Order Codes	
FSDG2	Control panel, 2 zones, 2 sounder ccts
FSDG4	Control panel, 4 zones, 2 sounder ccts

Technical Specifications	
No of zones	2 or 4
Cabinet size	308mm W x 260mm H x 80mm D
Battery capacity	2 x 3.2Ah 12v SLA
Sounder circuits	2
Power Supply	1.25 amp switch mode

