



AussieDuct



DATA SHEET:

JUNCTION BOXES (JBR)

AUSTRALIAN MADE BY AN AUSTRALIAN OWNED COMPANY, AUSSIE DUCT JUNCTION BOXES ARE MADE TO THE HIGHEST QUALITY. MANUFACTURED TO AUSTRALIAN STANDARD AS/NZS2053 AND CONFORMS WITH "BEST PRACTICE GUIDELINES FOR PVC IN THE BUILT ENVIRONMENT" (GREEN STAR). SUITABLE FOR BOTH AUSSIE DUCT MEDIUM DUTY AND HEAVY DUTY APPLICATIONS.


100%AussieMade



TECHNICAL SPECIFICATION

MATERIAL	PVC-U
COLOUR	GREY
DUTY RATING	HEAVY
PRODUCT STANDARD	AS/NZS2053.2
UV RESISTANT	YES—UV (T) STABILISED
B.E.P CERTIFIED	YES (CERTIFICATE: 4008)
TEMPERATURE RANGE	0-60°C
IP INGRESS PROTECTION	IP66* (FULLY SOLVENT CEMENTED AUSSIE DUCT CONDUIT SYSTEM)
DIELECTRIC STRENGTH	ELECTRO-INSULATING
FLAME PROPAGATION	NON-FLAME PROPAGATING
QUALITY MANAGEMENT SYSTEM	ISO9001:2015 (CERTIFICATE: QEC0597)

**AS/NZS2053.2
COMPLIANT**

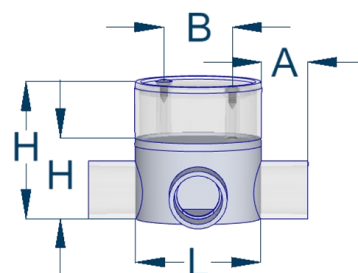

Product Code	Nominal Size (mm)		Box Diameter (mm) L	Box Depth (mm) H	Socket Length (mm) A	Screw Hole Dist (mm) B	Pack Qty
JBR20/1GR	20	1 WAY	65	38	25	50	10
JBR20/2GR	20	2 WAY	65	38	25	50	10
JBR20/2AGR	20	2 WAY (ANGLE)	65	38	25	50	10
JBR20/3GR	20	3 WAY	65	38	25	50	10
JBR20/4GR	20	4 WAY	65	38	25	50	10
JBR20/1DGR	20	1 WAY	65	72	25	50	10
JBR20/2DGR	20	2 WAY	65	72	25	50	10
JBR20/2ADGR	20	2 WAY (ANGLE)	65	72	25	50	10
JBR20/3DGR	20	3 WAY	65	72	25	50	10
JBR20/4DGR	20	4 WAY	65	72	25	50	10
JBR25/1GR	25	1 WAY	65	38	25	50	10
JBR25/2GR	25	2 WAY	65	38	25	50	10
JBR25/2AGR	25	2 WAY (ANGLE)	65	38	25	50	10
JBR25/3GR	25	3 WAY	65	38	25	50	10
JBR25/4GR	25	4 WAY	65	38	25	50	10
JBR25/1DGR	25	1 WAY	65	72	25	50	10
JBR25/2DGR	25	2 WAY	65	72	25	50	10
JBR25/2ADGR	25	2 WAY (ANGLE)	65	72	25	50	10
JBR25/3DGR	25	3 WAY	65	72	25	50	10
JBR25/4DGR	25	4 WAY	65	72	25	50	10