


# Data Sheet

## LG302


- 3 Way Booster Box with Digital Bypass & Circuit Protection
- Designed to ensure the transfer of superior quality digital signals between all your home entertainment systems
- Booster has a built-in short circuit protection on each individual output
- With integrated by-pass, designed to allow the user to control SKY™ digital receivers from a second TV without additional equipment apart from a Link device and a SKY™ or compatible universal remote control
- For indoor use only

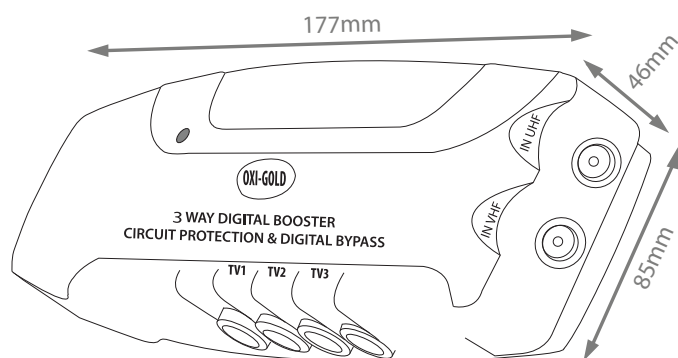

<b>Code</b>	LG302
<b>Description</b>	3 Way Booster Box with Digital Bypass & Circuit Protection
<b>Size</b>	177mm (W) x 85mm (H) x 46mm (D)
<b>Range</b>	Selectric OXi-GOLD - Audio, Visual & Digital Accessories
<b>Colour</b>	Black
<b>Material</b>	Fire Retardant ABS (Acrylonitrile Butadiene Styrene)
<b>Included</b>	Instructions & fixing kit
<b>Weight</b>	0.455kg
<b>Inner Carton Quantity</b>	1
<b>Inner Carton Weight</b>	0.510kg
<b>Barcode</b>	5025117986783
<b>Commodity Code</b>	852910
<b>Standards</b>	BS 3041-7, EN 55013, EN 55020 & EN 61000-3
<b>Notes</b>	<ul style="list-style-type: none"> <li>• Link up to 3 additional TV sets</li> <li>• Complete with 1M power cable &amp; 3 amp tough plug</li> <li>• For indoor use only and should be used in accordance with the instructions provided</li> <li>• CE Marked</li> </ul>

# Data Sheet

## LG302

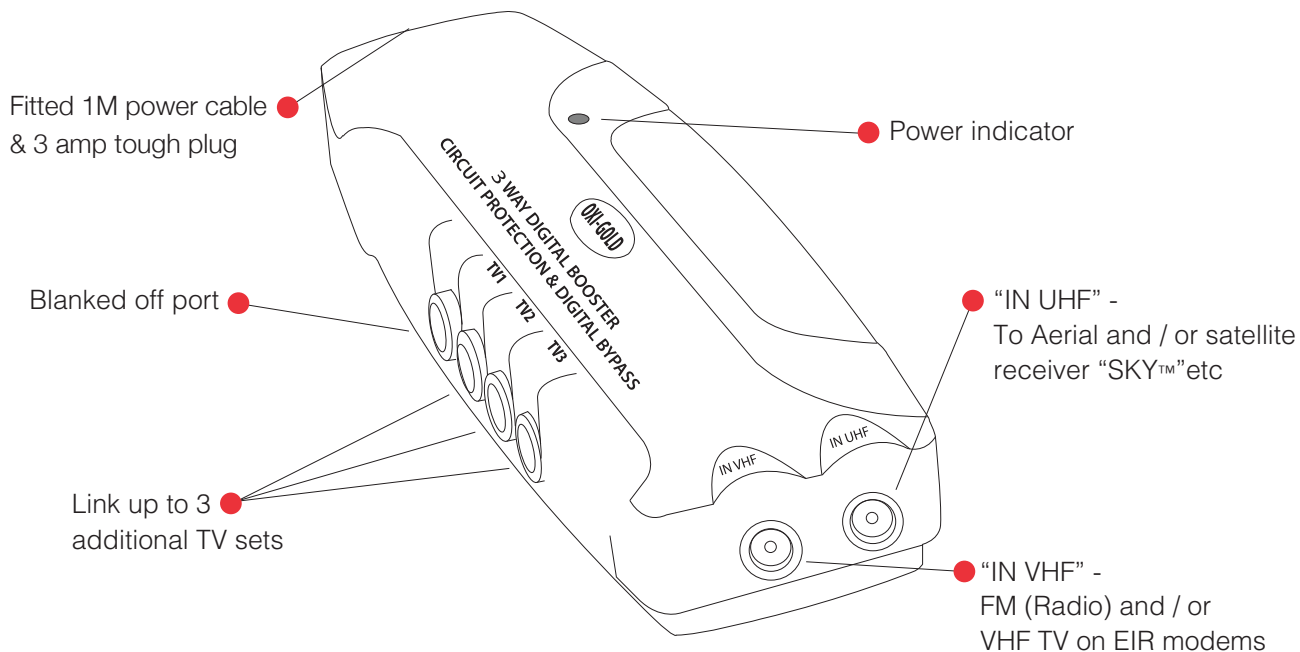

Frequency	VHF 47-230MHz - UHF 470-860MHz - FM 88-108MHz
Gain - Full Output	12dB
Gain - Per Port	9-12dB
Noise	< =3.5dB
Isolation Loss	23dB
Impedence	75Ω
Voltage	220-240V / AC
Line Power	12V 25mA
Hertz	50Hz
Rated Power	3.5 Watt
Wall / Surface Mounting?	Yes - Mounting Holes: 74mm apart
Suspended Mounting?	No
Ceiling Mounting?	No
Built-in Mounting?	No