



## DATA SHEET:


### COMMUNICATIONS PVC CONDUIT 4.5M

(BRANDED COMMUNICATIONS) SUITABLE FOR NBN & OTHER NETWORKS

AUSTRALIAN MADE BY AN AUSTRALIAN OWNED COMPANY, AUSSIE DUCT COMMUNICATIONS CONDUIT 4.5M IS SUITABLE FOR INDOOR AND OUTDOOR INSTALLATIONS. CONFORMS WITH "BEST PRACTICE GUIDELINES FOR PVC IN THE BUILT ENVIRONMENT" (GREEN STAR). WE ALSO MANUFACTURE A FULL RANGE OF BENDS AND ASSOCIATED CONDUIT FITTINGS FOR OUR COMMUNICATIONS CONDUIT.

100% AussieMade

TECHNICAL SPECIFICATION	
MATERIAL	PVC-U
COLOUR	WHITE
DUTY RATING	20MM & 50MM RATED TO PN12, 100MM RATED TO PN9
UV RESISTANT	YES - UV (T) STABILISED
B.E.P CERTIFIED	YES (CERTIFICATE: 4008)
TEMPERATURE RANGE	0-60°C
IP INGRESS PROTECTION	IP66* (*FULLY SOLVENT CEMENTED AUSSIE DUCT CONDUIT SYSTEM)
DIELECTRIC STRENGTH	ELECTRO-INSULATING
FLAME PROPAGATION	NON-FLAME PROPAGATING
QUALITY MANAGEMENT SYSTEM	ISO9001:2015 (CERTIFICATE: QEC0597)
PRODUCT STANDARD	AS/NZS1477:2006 (DIMENSIONS ONLY)
MEETS COMMUNICATIONS ALLIANCE LTD AUSTRALIAN STANDARD AS/CA S2008:2010	

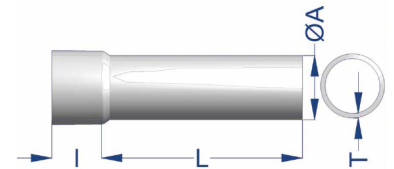

#### COMMUNICATIONS 4.5M - WHITE

Meets all NBN specifications to NBN-TE-194/REV8.0

SIZE	PRODUCT CODE	NOMINAL SIZE (mm)	EFFECTIVE LENGTH (M) L	MEAN O.D. (mm) ØA	NOM WALL THICKNESS (mm) T	SOCKET LENGTH (mm) I	BUNDLE QTY	CRATE QTY
P20	NBN20WH4500	20	4.5	27	1.55	30	10	730
P50	NBN50WH4500	50	4.5	60.3	3.35	50	1	175
P100	NBN100WH4500	100	4.5	114	4.5	100	1	54