


Order Code: XCBHX1M3MS
BULKHEAD X1 - 8W-16W - 3000K-6000K + Wattage Switchable - Fixed output - Emergency - Microwave sensor

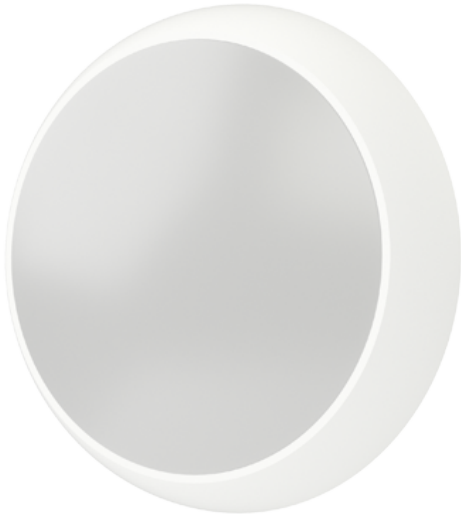

- Features
- Suitable for most domestic and commercial applications
 - CCT [3000K/4000K/6000K] adjustable via simple 3-way selector switch
 - Wattage [8 to 16] adjustable via selector switch
 - Ideal for communal spaces and stairwells
 - Twist On/Off diffuser with screwlock suitable for public spaces
- Construction
- Manufactured from durable thermoplastic materials
 - Plug and play emergency and sensor for quick and easy upgrade
- Installation Notes
- 4-point conduit entry for surface mount cable entry

Technical Data

General	
Luminaire Wattage (W)	8 to 16
Weight (kg)	1.47
Operating Temperature (ta °C)	5° to 25°
Light Output	
Lumens (lm)	1000 - 1900
Efficacy (lm/W)	130
LED	
CRI	80
Macadam Elipses	1.5 to 9.1
Driver	
Driver Current (mA)	140 to 215 to 280
Forward Voltage (V)	47.6 to 50
Emergency	
Emergency Lumen Operating	135
Emergency Wattage (W)	2

Electrical	
Rated Input Current (A)	0.04 to 0.07
Power Factor (pf)	0.82 to 0.92
Input Voltage Range (VAC)	220 to 240
Inrush Current Peak (A)	2.08
Surge Protection (kV)	1KV
Conductor Size (mm)	0.5 to 2.5
Terminal Type	4 pole piano key

Order Code: XCBHX1M3MS
BULKHEAD X1 - 8W-16W - 3000K-6000K + Wattage Switchable - Fixed output - Emergency - Microwave sensor

Dimensions

B (mm)	85
Dia. (mm)	320

Line Drawing

