

2 AAA BATTERIES

XPP-5410G

INTRINSICALLY SAFE PENLIGHT

**NIGHTSTICK**  
*Life Depends on Light™*

**CLASS I  
DIV 1**

**ATEX  
ZONE 0**

**IP-67  
DUST/WATER  
PROOF**




**Limited lifetime warranty.** Long lasting durability



**Momentary or constant-on functionality.** Only use it when you need it, or keep it on.



**Streamlined integrated pocket clip.** Rugged clip keeps your light handy and secure.



**Impact and chemical resistant with a limited lifetime warranty.**



**30 LUMENS**

1-800-233-2155 • 1-469-326-9400 • [nightstick.com](http://nightstick.com)

© 2021 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit [nightstick.com](http://nightstick.com) for product updates.

# INTRINSICALLY SAFE PENLIGHT

## 2 AAA BATTERIES

### ITEM NUMBER/UPC

-XPP-5410G, UPC 0 1739880298 7

### MARKET APPLICATIONS

-Hazardous work environments, industrial, automotive

### CERTIFICATIONS

- CLASS I DIV 1: GRPS A-D T3
- CLASS II & III DIV 1: GRPS E-G T135°C
- CLASS I ZONE 0: AEX IA IIC T3 GA
- CLASS I ZONE 0: EX IA IIC T3 GA
- ATEX CERTIFICATION: IM 1 EX IA OP IS I MA
- ATEX CERTIFICATION: II 1 G EX IA OP IS IIC T3 GA
- IECEx CERTIFICATION: EX IA OP IS I MA
- IECEx CERTIFICATION: EX IA OP IS IIC T3 GA

### CASE MATERIAL

-Engineered polymer

### FLASHLIGHT LUMENS/RUNTIME

-30L, 18 hrs. runtime

### CANDELA

-107

### BEAM DISTANCE

-40m

### DUST/WATER RATING

-ANSI IP-67 dustproof / waterproof

### DROP RATING

-2 meters

### DIMENSIONS

- LENGTH: 5.8 in (147 mm)
- HANDLE DIAMETER: 0.7 in (18 mm)
- HEAD DIAMETER: 0.9 in (23 mm)
- WEIGHT: 1.18 oz (33 g)

### BATTERY


-AAA

### WARRANTY

-Limited lifetime

### WHAT'S INCLUDED

- Light
- 2 AAA batteries

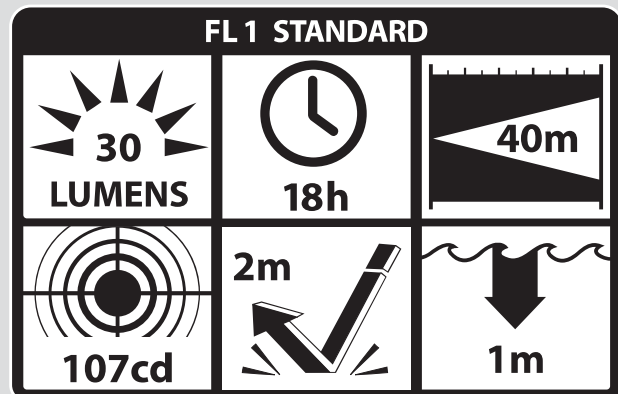

### Permissible XPP-5410 Flashlight Assembly



APPROVAL No. 20-A140006-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: The Model XPP-5410 is MSHA approved for use with Energizer (Type E92), two Energizer (Type EN92), and Duracell (Type MX2400), Duracell (PC2400), and Duracell (EN92) batteries only. Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types. The Model XPP-5410 must not be opened in area where permissibility required.



CLASS I DIV 1 GRPS A-D T3

CLASS II & III DIV 1 GRPS E-G T135°C

CLASS I ZONE 0 AEx ia IIC T3 Ga

CLASS I ZONE 0 Ex ia IIC T3 Ga

Ⓜ IM 1 Ex ia op is I Ma

Ⓜ II 1 G Ex ia op is IIC T3 Ga

Ex ia op is I Ma

Ex ia op is IIC T3 Ga

Intertek ITS 13 ATEX27839X

IECEx ITS 14.0036X

-20°C ≤ Tamb ≤ +40°C

1.5V/Cell AAA Alkaline

INTRINSICALLY SAFE

SECURITE INTRINSEQUE

CE 2575

UK CA

Seguranga

INMETRO

NCC 15.019 X

### Conforms to:

ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

### Certified to:

CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

### CERTIFIED

