

**3 AA BATTERIES**

**INTRINSICALLY SAFE PERMISSIBLE FLASHLIGHT**

**XPP-5420BA, XPP-5420GA**

**NIGHTSTICK®**  
*Life Depends on Light™*



**IP-67  
DUST/WATER  
PROOF**

**ZONE 0**

**CLASS I  
DIV 1**


**XPP-5420BA**



Large, textured buttons



Durable polymer body is  
impact & chemical resistant



Sharp focused flashlight beam



AVAILABLE IN  
MULTIPLE COLORS



**XPP-5420GA**

**140 LUMENS**

1-800-233-2155 · 1-469-326-9400 · [nightstick.com](http://nightstick.com)

© 2021 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit [nightstick.com](http://nightstick.com) for product updates.

# INTRINSICALLY SAFE FLASHLIGHT

**3 AA BATTERIES** (not included)

**ITEM NUMBER/UPC**

- XPP-5420BA, UPC 0 1739880805 7
- XPP-5420GA, UPC 0 1739880806 4

**MARKET APPLICATIONS**

- Hazardous work environments, industrial, fire and rescue

**CERTIFICATIONS**

- cETLus, CE, UKCA, MSHA

**CASE MATERIAL**

- Engineered polymer

**FLASHLIGHT LUMENS/RUNTIME**

- 140L, 14 hrs. runtime

**CANDELA**

- 7,500

**BEAM DISTANCE**

- 180 m

**WATER RATING**

- ANSI IP-67 dustproof / waterproof

**DROP RATING**

- 2 meters

**DIMENSIONS**

- LENGTH: 7.0 in (178 mm)
- HANDLE DIAMETER: 1.1 in x 1.5 in (28 mm x 38 mm)
- HEAD DIAMETER: 1.8 in (46 mm)
- WEIGHT: 7.3 oz (207 g)

**POWER SOURCE**


- AA batteries (not included)

**WARRANTY**

- Limited lifetime

**WHAT'S INCLUDED**

- Flashlight
- Removable lanyard

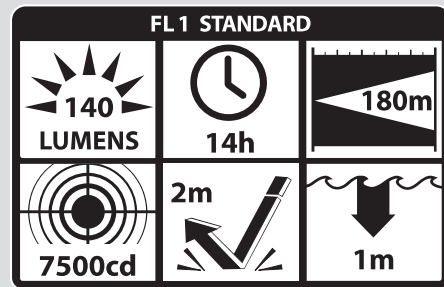

**Bayco Products, Inc. XPP-5420BA**  
 640 S. Sanden Blvd.  
 Wylie, TX 75098



ID 4003544  
 INTRINSICALLY SAFE  
 SECURITE INTRINSEQUE



CLASS I DIV 1 GRPS A-D T3  
 CLASS II & III DIV 1 GRPS E-G T135C  
 CLASS I ZONE 0 AEx ia IIC T3 Ga  
 CLASS I ZONE 0 Ex ia IIC T3 Ga  
 Ⓜ I M 1 Ex ia op is I Ma  
 Ⓜ II 1 G Ex ia op is IIC T3 Ga

Ex ia op is I Ma  
 Ex ia op is IIC T3 Ga  
 Intertek ITS 13 ATEX27837X  
 IECEX ITS 16.0067X  
 -20°C ≤ Tamb ≤ +40°C  
 1.5V/Cell AA Alkaline

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0,  
 ANSI/UL 60079-11 ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157  
 CAN/CSA STD C22.2 No 60079-0  
 CAN/CSA STD C22.2 No 60079-11  
 CSA STD C22.2 No 25

SEE INSTRUCTION MANUAL  
 VOIR MANUEL

MFG MM-YY

**Bayco Products, Inc. XPP-5420GA**  
 640 S. Sanden Blvd.  
 Wylie, TX 75098



ID 4003544  
 INTRINSICALLY SAFE  
 SECURITE INTRINSEQUE



CLASS I DIV 1 GRPS A-D T3  
 CLASS II & III DIV 1 GRPS E-G T135C  
 CLASS I ZONE 0 AEx ia IIC T3 Ga  
 CLASS I ZONE 0 Ex ia IIC T3 Ga  
 Ⓜ I M 1 Ex ia op is I Ma  
 Ⓜ II 1 G Ex ia op is IIC T3 Ga

Ex ia op is I Ma  
 Ex ia op is IIC T3 Ga  
 Intertek ITS 13 ATEX27837X  
 IECEX ITS 16.0067X  
 -20°C ≤ Tamb ≤ +40°C  
 1.5V/Cell AA Alkaline

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0,  
 ANSI/UL 60079-11 ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157  
 CAN/CSA STD C22.2 No 60079-0  
 CAN/CSA STD C22.2 No 60079-11  
 CSA STD C22.2 No 25

SEE INSTRUCTION MANUAL  
 VOIR MANUEL

MFG MM-YY

CERTIFIED

