BELLlighting

Dura

LED Integrated Anti Corrosive Batten

# Dura 52W LED Anti-Corrosive 5ft Double Batten in Emergency - 4000K

## Part Code: 06717

The Dura LED Anti Corrosive Batten is one of BELL's flagship Luminaires. This fully enclosed luminaire comes with stainless steel diffuser clips, ideal for exterior lighting projects that are open to the elements.



- Special high light transmission frosted polycarbonate diffuser for uniform lighting
- Fully enclosed luminaire - comes with stainless steel diffuser clips and suspension brackets
- Injection moulded polycarbonate body - suitable for food environments
- Ideal for exterior lighting projects that are open to the elements
- Tool-free termination

**IP66**
Rated

**7 Year**
Guarantee

**IK10**
Rated

**85**
Colour Rendering Index



**Email:** technical@belllighting.co.uk
**Telephone:** 01924 893380

**www.belllighting.co.uk**

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

BELLlighting

Dura


# LED Integrated Anti Corrosive Batten




| | |
|---|---|
| **Product Category** | Fittings / LED Battens |
| **Application** | LED Batten |
| **Product Warranty** | 7 Years (2 Years On Site) |
| **EAN** | 5013588067179 |
| **Commodity Code** | 9405423100 |
| **Country of Origin** | CN |

| Technical Specification | |
|---|---|
| Wattage (W) | 52 |
| Equivalent Wattage (W) | 116 |
| Volts (V) | 220/240 |
| Colour Temperature (K) | 4000 |
| Lumen Output (lm) | 8448 |
| Lumens per Watt (lm/W) | 162 |
| Emergency Lumen Output (lm) | 406 |
| Candelas | 1950 |
| CRI (ra) | 85 |
| Frequency (Hz) | 50/60 |
| LED Drive Current | 1080mA |
| Energy Consumption (kWh/1000h) | 52 |
| Life Hours | 50000 |
| Switching Cycles | 25000 |
| IK Rating | IK10 |
| IP Rating | IP66 |
| Operating Temperature | 0°C - +35°C |
| Lumen Maintenance Ratio | L80 B10 |

| Packaging Information | |
|---|---|
| Minimum Order Quantity | 1 |
| Height (mm) | 90 |
| Depth (mm) | 125 |
| Length (mm) | 1530 |
| Individual Product Weight (kg) | 2.89 |
| Single Box Weight (kg) | 3.21 |
| Single Box Height (mm) | 95 |
| Single Box Width (mm) | 135 |
| Single Box Depth (mm) | 1565 |
| Single Box Volume | 0.02007 |
| Outer Box Qty | 4 |
| Outer Box Barcode | 0671700000004 |
| Outer Box Weight (kg) | 13.9 |
| Outer Box Height (mm) | 215 |
| Outer Box Width (mm) | 310 |
| Outer Box Depth (mm) | 1590 |
| Outer Box Volume | 0.10597 |
| UNSPSC Code | 39111544 |

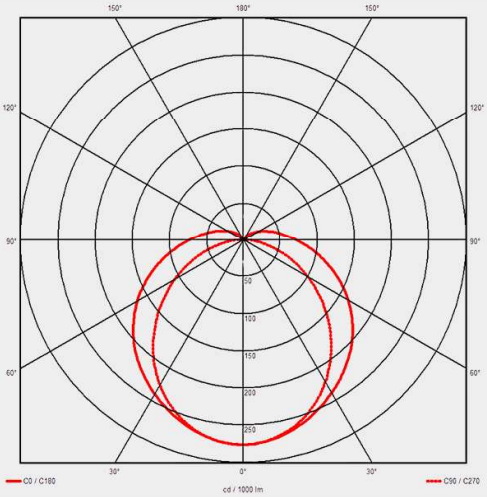

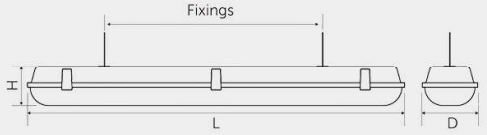
**Email:** technical@belllighting.co.uk
**Telephone:** 01924 893380

**www.belllighting.co.uk**

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

BELLlighting

Dura

# LED Integrated Anti Corrosive Batten

| Additional Information | |
|---|---|
| **Beam Angle** | 128° |
| **Power Factor** | 0.97 |
| **Battery Type** | LiFePO4 |
| **Standard Deviation Colour Matching** | <3-step MacAdam Ellipse |

| Accessories | |
|---|---|
| **09129** | Batten Mount 1W Emergency Pack for Battens - Open Area Lens |
| **08700** | LED 2.5W Emergency Pack for Selected Battens, Floodlights & Wallpacks |
| **08709** | Emergency Pack for Dura & Ultra LED Battens |
| **70155** | Plug In Emergency Pack for the Merit Batten |

**Email:** technical@belllighting.co.uk
**Telephone:** 01924 893380



The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.