


**Specifications**

- Standard Length 3.0 metres.
- Overall height 50 mm
- Cable laying depth 40 mm

**Surface Finish**

Available Finish	Code
Pre-Galvanised	G
Hot Dip Galvanised	H
Aluminium	A
Stainless Steel	S

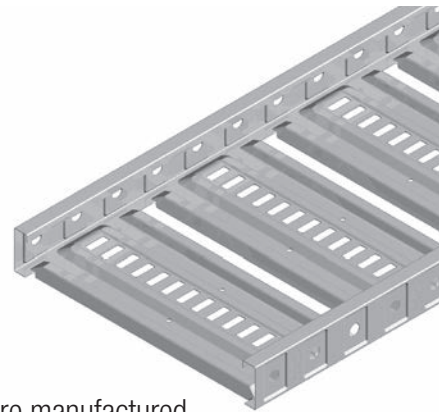

**Note**

- Aluminium & Stainless Steel products are manufactured against firm orders only and are non returnable.


**\*Contact your local sales office for load data for Aluminium ladder tray**

- Powder coating and special finishes on request against firm orders only and are non returnable.



Cable Laying Width mm	Pre-Galvanised	Hot Dip Galvanised	Aluminium	Stainless Steel	Overall Width mm
150	LT3150G	LT3150H	LT3150A	LT3150S	172
300	LT3300G	LT3300H	LT3300A	LT3300S	322
450	LT3450G	LT3450H	LT3450A	LT3450S	472
600	LT3600G	LT3600H	LT3600A	LT3600S	622

**LT3 Laddertray**

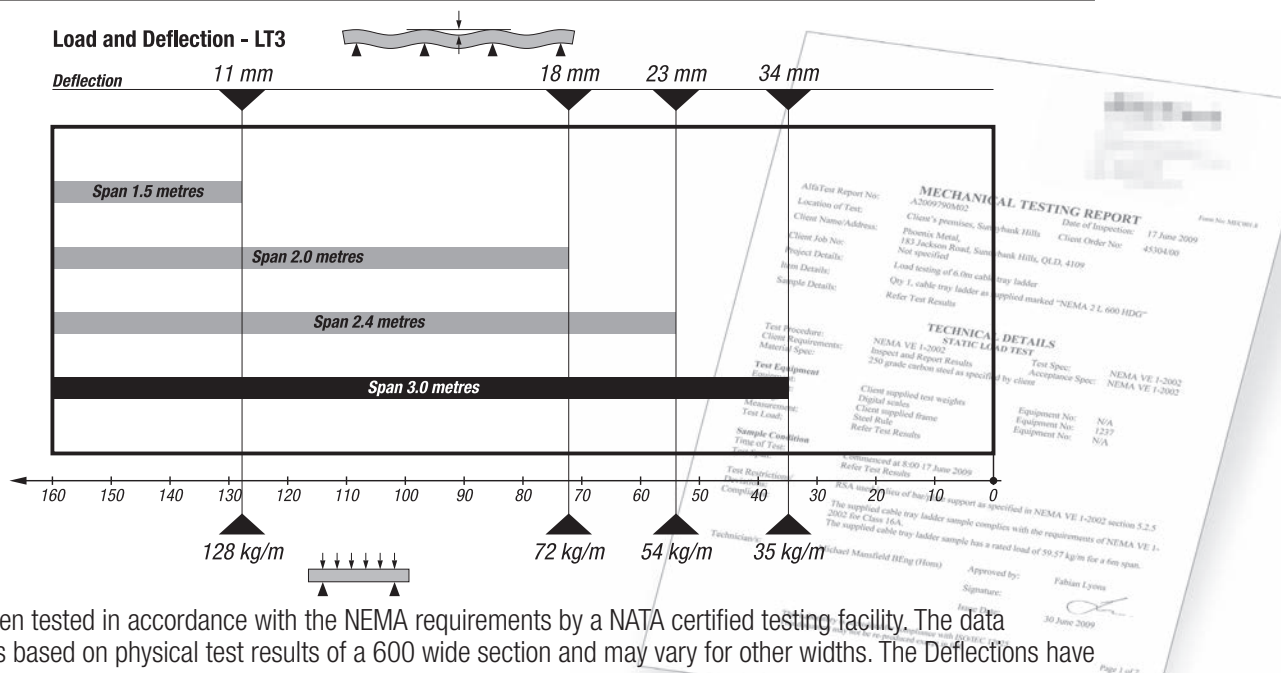

LT3 has been tested in accordance with the NEMA requirements by a NATA certified testing facility. The data displayed is based on physical test results of a 600 wide section and may vary for other widths. The Deflections have been provided as a guide based on continuous spans, and cannot be applied to end spans. Data provided assumes that the installation will be carried out in accordance with NEMA VE2. Non compliance may affect the overall product performance. **\*Contact your local sales office for load data for Aluminium ladder tray**