


couplers – length to length

EDRN

■ EDRN – couplers


EDRN couplers are supplied with one fixing tool in each pack of 50 couplers. No additional fasteners or tools required

■ Installation

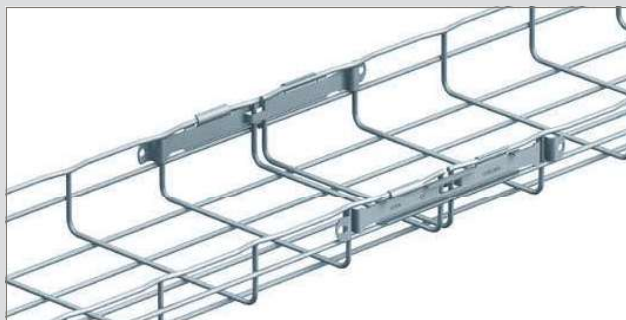


EDRN couplers are used in pairs across the side rail joint of two lengths of tray as shown


■ Assembly

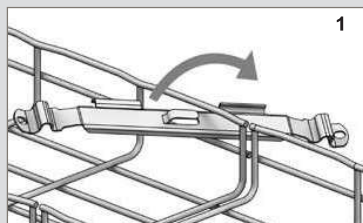

1. Position coupler as indicated

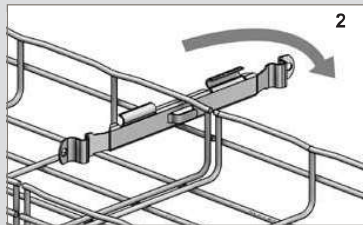

2. Twist coupler into place

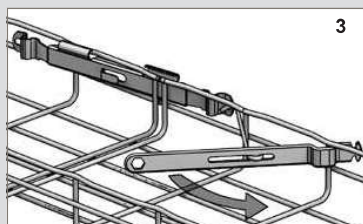

3. Use fixing tool (supplied) to pull coupler into place



Fast assembling



Fixing without nuts and bolts

■ Assembly (continued)

The table below indicates the recommended quantity of EDRN couplers required per width of steel wire cable tray


Note: for base coupling, CEFAS (p. 64) can be used as an alternative to EDRN couplers

A → i j ← A = side coupling B = base coupling

	50		100		150		200		300		400 → 500		600	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B
CF30	2	0	2	0	2	0	2	1	2	1	2	2	2	3
CF54	2	0	2	0	2	0	2	0	2	1	2	2	2	3
CF80	–	–	2	1	–	–	2	2	2	2	2	3	2	3
CF105	–	–	2	1	2	1	2	2	2	3	2	3	2	3
CF150	–	–	–	–	–	–	2	2	2	3	2	3	2	3

■ Dimensions and weights

30 → 150 mm 50 → 600 mm



	Weight (kg)		
	EZ	EZ+	DC
EDRN	0.07	0.07	0.07

Please use Cat. No. when placing your order, see p. 20

All weights are given in Kilograms (kg)

Key:	EZ Electrogalvanised after manufacture	DC Zinc rich coating
	EZ+ Additional coating after electrogalvanisation (black)	

For detailed information related to finishes, refer to p. 132-133

All dimensions (mm) are nominal

→ Straight lengths : see p. 44-55