wall mounting socket outlet, switched, interlocked - housing dimensions 225x118



Product description	
BALS-Prd.-Nr	16212
EAN	4024941162128
Product group	Quick-Connect wall mounting socket outlet, switched, interlocked
Current	32A
Number of poles	5p
Arrangement of the phases	3P+N+PE
Earth 'clock' position	6 h
Voltage	200/346 up to 240/415V


Bals Elektrotechnik GmbH & Co. KG D-57399 Kirchhundem - Albaum
phone: +49(0)2723/771-0 / fax: +49(0)2723/771-177 / email: info@bals.com

Product description	
Frequency	50 and 60Hz
Protection degree	IP67
Colour code	red
Colour of appliance	Hinged lid red, Bayonet ring grey, Housing screws grey, Housing bottom grey, Housing top grey, Control knob grey
Connection design	screwless spring terminals as cage clamp with Kontext-contact
Maximum conductor size	10,0 qmm
Cable entry	M25
Dimension of enclosure	225x118 mm (HxW)
Material of enclosure	Polycarbonate
Contacts	the contacts are brass nickel plated

Logistics data	
Weight/pcs	1.2 kg / piece
Packaging	carton
Content amount	1 ST
EAN	4024941162128
Length	275 mm
Width	175 mm
Height	137 mm
Weight	1.325 kg

Bals Elektrotechnik GmbH & Co. KG D-57399 Kirchhundem - Albaum
phone: +49(0)2723/771-0 / fax: +49(0)2723/771-177 / email: info@bals.com

Logistics data	
Volume	5,737.5 ccm

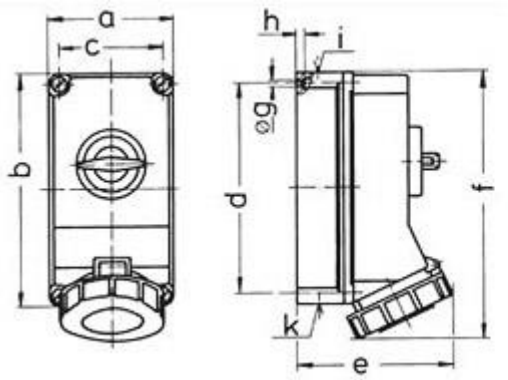

Amperes	32		
Poles	3	4	5
a	118	118	118
b	225	225	225
c	101	101	101
d	208	208	208
e	143	143	149
f	255	255	255
Ø g	6.5	6.5	6.5
h	8	8	8
i	1x M25	1x M25	1x M25
k	2x M25	2x M25	2x M25

Bals Elektrotechnik GmbH & Co. KG D-57399 Kirchhundem - Albaum
phone: +49(0)2723/771-0 / fax: +49(0)2723/771-177 / email: info@bals.com