




ASD 1

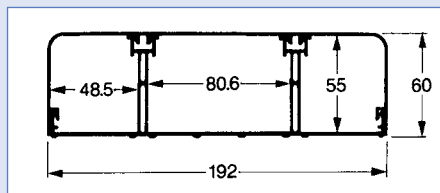

## Three Compartment

Cat No.	Description	Standard Pack Quantity
ASD 1	Trunking complete with lids	2 x 3m
<b>Accessories</b>		
ACS 1	Coupler	2
AISC6 1	Internal Angle Cat 6 Data	1
AIS 1/45	Internal Angle 45 (Fabricated)	1
AES 1	External Angle c/w dividers	1
AES 1/45	External Angle c/w dividers 45 (Fabricated)	1
AECS 1	End Cap	2
AMCR 1	Cable Retainer, Centre	6
ASR 1	Cable Retainer, Square	6
AFA 1	Flat Angle	1
AFT 1	Flat Tee	1
ACO 1	Crossover Unit (Fabricated)	1
ASB 1	Outlet Box, 1 Gang, 32mm	10
ASB 1V	Outlet Box, 1 Gang, 32mm, 4 Pillars	10
ASB 2	Outlet Box, 2 Gang, 32mm	10
ASB 3	Outlet box, 3 Gang, 32mm	5
ASBC6 1	Outlet Box 1 Gang, 40mm	10
ASBC6 2	Outlet Box 2 Gang, 40mm	10
ASP 1	Outlet Plate, 1 Gang	15
ASP 2	Outlet Plate, 2 Gang	15
ALF 1	Centre Lid Spacer, 15mm	10
ABR 1	Bridge Piece, Square	2
ABR 3	Bridge Piece, Centre	2
AWPS 1	Wall Plate	2
ACGE 60	External Corner Guard	6

Standards:

BSEN 50173/50174-2; ISO/IEC 11801;  
ANSI/TIA/EIA 568-B; BS7671: BS6701; BS  
4678, part 4.

All fabricated fittings require couplers at joints. Internal and External angles are supplied complete with locking devices and caps. For close fitting of outlet boxes, lid spacer ALF1 should be used. For EMC screening details, please refer to page 22.

