

# SUPALITE

## LED Emergency Flood Light

The Supalite LED Flood is available in a standard or IP65 weatherproof and is ideal for applications such as loading bays, car parks and evacuation points

Market leading lithium battery technology delivers lower maintenance costs and LED lamps provide a low standby power rating that will reduce energy costs significantly.

### Applications

- |   |   |
|---|---|
|  Warehouses |  Car Parks         |
|  Factories  |  Sports Facilities |
|  Schools    |  Railway Stations  |

<b>EL</b> LITHIUM IRON PHOSPHATE ECONOMY <small>LOWEST UPFRONT COST</small>	<b>LP</b> LITHIUM IRON PHOSPHATE PREMIUM <small>PROVEN PROJECT PERFORMANCE</small>	<b>L10</b> LITHIUM NANOPHOSPHATE <sup>®</sup> OPTIMUM <small>NOTHING ELSE COMPETES WITH NANOPHOSPHATE<sup>®</sup></small>
		

### Features and Benefits

- AS/NZS 2293.3 compliant
- IP65 Weatherproof version
- Low power consumption
- LED lamps
- 350-1200 lumen options
- Lithium Iron Phosphate or Nanophosphate<sup>®</sup> battery
- Clevertest Plus System compatible

 LED	 IP20
 Surface Mount	 IP65
 Non-Maintained	
 LFP	
 LNP	



# SUPALITE


PART NO.	ORDERING INFORMATION		EL	LP	LP WEATHERPROOF	L10	L10 WEATHERPROOF
		Standard - White		EFLLED-LI	CFLLED	CWFLED	LFLED
	Standard - Black		-	CFLLED-BLK	CWFLED-BLK	LFLED-BLK	LWFLED-BLK
	Clevertest Plus System Compatible		No	Yes			
	DALI		-	CFLLED-DALI	CWFLED-DALI	LFLED-DALI	LWFLED-DALI
	Zoneworks® XT Hive		-	CFLLED-HV	CWFLED-HV	LFLED-HV	LWFLED-HV
	Carton Quantity		10	10	1	10	1
	Weight - single (carton)		1.4kg (15.2kg)	1.4kg (15.2kg)	3.6kg	1.4kg (15.2kg)	3.6kg
	Dimensions (L x W x H)		282mm x 64mm x 225mm	282mm x 64mm x 225mm	380mm x 130mm x 310mm	282mm x 64mm x 225mm	380mm x 130mm x 310mm

POWER, LAMPS AND BATTERY	EL	LP	LP W/PROOF	L10	L10 W/PROOF
	Power Consumption (Standby / Max)	0.4W / 2.4W	0.4W / 2.2W	1.0W / 5.4W	0.4W / 2.2W
Lamp(s)	2 x LED Heads				
Lumen Output (Per Head / Total)	175lm / 350lm	185lm / 370lm	600lm / 1200lm	185lm / 370lm	495lm / 990lm
Battery	Lithium Iron Phosphate			Lithium Nanophosphate®	
Voltage / Capacity (mAh)	3.2V / 6000mAh	3.2V / 6400mAh	6.4V / 3200mAh	3.3V / 5000mAh	6.6V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage				

TECHNICAL SPECIFICATIONS	EL	LP	LP W/PROOF	L10	L10 W/PROOF
	Operating Mode	Non-Maintained			
Voltage (V) (Frequency (Hz))	220-240V(50Hz)				
Operating Temperature	1°C to 40°C	1°C to 40°C	0°C to 40°C	1°C to 40°C	0°C to 40°C
Ingress Protection Rating (IP)	IP20	IP20	IP65	IP20	IP65

SPARE PARTS	EL	LP	LP W/PROOF	L10	L10 W/PROOF
	Battery	1560250	1550230	1550290	1530230
DALI Node	-	8003060	8003060	8003060	8003060
Zoneworks® XT Hive Node	-	8003190	8003190	8003190	8003190

\*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

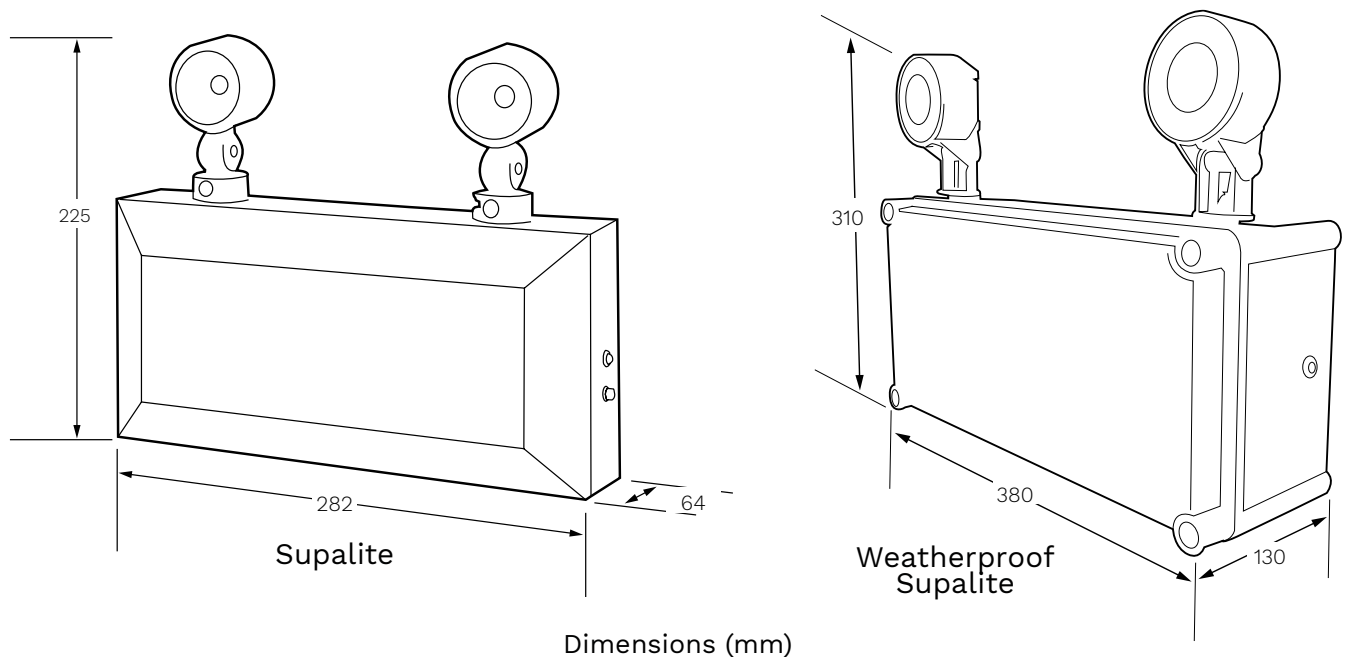

**clevertronics.co.nz**  
**clevertronics.com.au**

195 Chesterville Road, Moorabbin VIC 3189  
P +61 3 9559 2700 F +61 3 9559 2799 E [info@clevertronics.com.au](mailto:info@clevertronics.com.au)

Clevertronics is committed to continuously improving its products.  
All features and specifications are subject to change without prior notice.  
CT-BRO-ANZ-SUPALITE-EM-001

