

Technical Characteristics

Wiser IP Camera



Download

Wiser by SE app



The Wiser IP Camera Indoor provides day and night HD video recording, with a 340° panning view, motion detection notification alerts, intercom, and event or continuous recording. Simple and intuitive control via the Wiser by SE App from anywhere. Use standalone or integrate into the Wiser Smart Home System and Automations. It can be mounted on the ceiling or placed on a table top.



Wiser IP Camera Indoor

Identification

Commercial reference	CLP723419
Product or component type	Camera
Product colour	White

Power

Power supply	5 VDC, 2 A
Nominal power for AC adaptor	100-240 VAC, 50/60 Hz

Characteristics

Communication interface	Wi-Fi®- 2.4 GHz, IEEE802.11 b/g/n compliant
Security	Wi-Fi®- WPA-PSK /WPA2-PSK Data - AES128
Connector type	Micro USB port for the AC adaptor
Transmission capacity	Max. 100 mW
Camera	1/2.9" CMOS sensor 80° horizontal and 40° vertical wide-angle lens 0° - 340° pan angle -75° to +75° tilt angle F2.1 focal length 7 m IR range Full HD camera with night vision Motion detection and motion tracking Integrated patrol function with 340° recording option 2-way audio communication Screen flip function available, specially useful when installed on ceilings Supports time watermark, to record videos with date and time stamp
Motion detection range	7 m
Operating frequency	2405 - 2480 MHz
Image/Video	1080 P resolution Supports image snapshot, event recording and continuous recording.
Local storage support	Micro SD Card, max. 128 GB (not included)

Installation

Dimensions	Ø 56 × 73 × 134 mm
Weight	298 g
Material	Plastic


Environment

Operating temperature	-10 °C to 45 °C
Storage temperature	-20 °C to 60 °C
Operating humidity	≤ 95 % DH

Functions and settings

- Supports snapshot and video recording on micro SD card.
- Option to choose between 1-way and 2-way communication.
- Option to activate motion tracking.
- Can control the pan and tilt angles of the camera (via app).
- On detecting motion, sends notifications and snapshots.
- Can be integrated into automations created via Wiser by SE app.

Dimensions (mm)

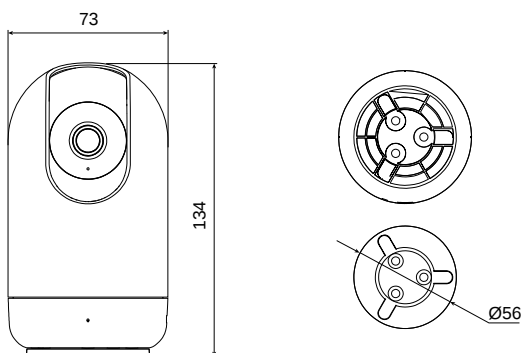

Note:

Download the Wiser by SE app to your smartphone, and install the Wiser Hub to configure and control Wiser devices. You can use the app to pair, set up and control Wiser devices. The Wiser by SE app is available in the App stores for smartphones supporting operating systems Android™ OS (version 7 and above) or Apple® iOS (version 11 and above).

For more detailed information, refer to the Wiser User Guides online. Scan the QR code or follow the link: <https://www.productinfo.schneider-electric.com/clipsal/>

