

Remote Pushbutton Station Unit - UP / E-STOP / DOWN




GENERAL SPECIFICATION/FEATURES

- Weatherproof to IP65
- Supplied complete with contact blocks
- Quick fit, easy to install
- Colour coded contacts
- Manufactured in accordance to IEC 60947-5-1
- CE Approved

This remote pushbutton station is ideally suited to work alongside our 3DR1/2/3 starters, solely as a slave to the main starter unit.

Voltage	24-230V
Contact Arrangement	Up = 1NO+1NC / EM.Stop = 1 NC / Down = 1 NO+1 NC
Operating Temperature	-25 to +55°C
Approvals	CE
Cable Size, Flexible (mm ²)	1.3
Cable Size, Solid (mm ²)	1.3
Ingress Protection	IP65
Mechanical Life	3,000,000 ops

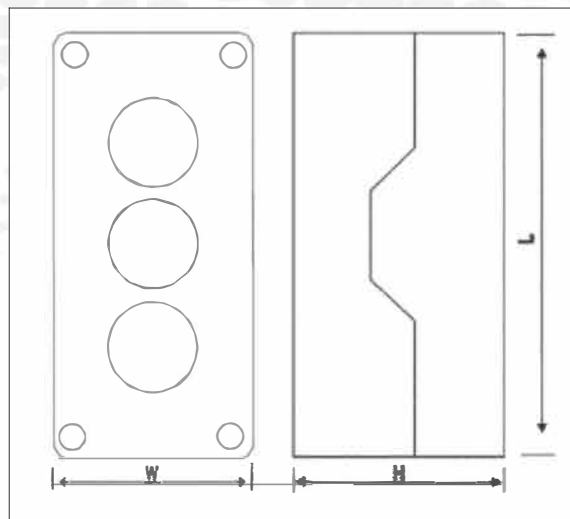

Dimensions: 51 x 68 x 134mm (H x W x L)

 Call us **NOW** for Technical Help and Pricing..!

01924 368251



+44 (0) 1924 368251



sales@cromptoncontrols.co.uk



www.cromptoncontrols.co.uk