

RCD Sockets & Spurs Datasheet

SMR13A/030 - Double RCD Metal Socket (Switched)

CONSTRUCTION AND FEATURES:


- Twin 13A 30mA RCD Switch Socket
- Complete with Test button
- 'Passive' type latching
- Designed for home and small office use
- Extra protection for specific equipment

TECHNICAL DATA:

- Rated Voltage: 240V AC
- Rated Current: 13A max
- Frequency: 50Hz
- Tripping Current: 30mA
- Tripping Speed: 40mS max
- Voltage Surge: 4K (100KHz Ring Wave)
- Breaking Capacity: 250A
- Short Circuit Withstand: 1.5kA
- Endurance: 3000 Cycles min
- Hit-Pot Test: 2000V / 1 minute
- IP Rating: IP4X
- Minimum Box Depth: 25mm
- Conforms to BS 7288:2016 & BS 5733
- Regulatory Approval: CE & UKCA



WIRING DIAGRAM:

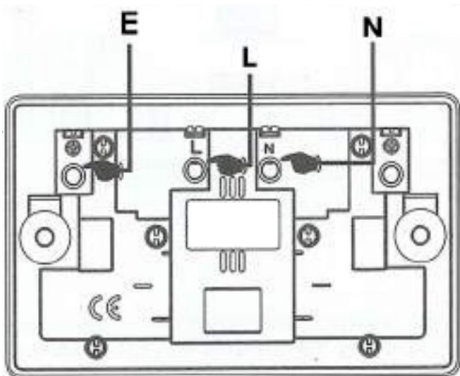

DIMENSIONAL SKETCH:

