
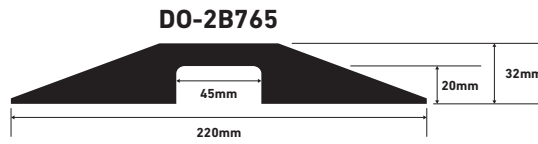


Rigid Single Channel Cable Protector

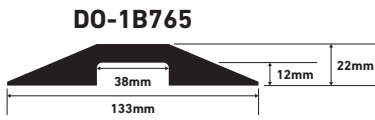

D-Line rigid Cable Protector lengths each have a simple and effective locking mechanism, so runs can be made in any length required.

Select 12mm or 20mm cavity height options according to cable diameters.

- Made from high-grade polyurethane, extremely robust
- Join by interlocking male:female connectors
- Tapered design & non-slip treads for pedestrian traffic
- Can accept up to 11.5t Axle Weight i.e. all vehicular traffic
- Durability gives exceptional value
- Fully safety tested and certified to BS7671:2008



Code	Description	Colour
DO-1B765	(L) 765mm x (W) 133mm x (H) 22mm Inner channel - (W) 38mm x (H) 12mm	Black
DO-2B765	(L) 765mm x (W) 220mm x (H) 32mm Inner channel - (W) 45 mm x (H) 20mm	Black