



Einhell

ACCESSORY



PXC-Starter-Kit

2x 4,0Ah & Twincharger Kit

Item No.: 4512112


Ident No.: 21010

Bar Code: 4006825655766

The Einhell 18V 2x 4.0Ah PXC Starter Kit is the ideal basis for starting or expanding the Power X-Change range in your home. A single rechargeable battery and a single charger for all tools not only saves significant costs of buying, universal use also helps protect the environment and provides flexibility. For high Power, long + sustained working time and to use 36V (2x18V) devices, two Batteries are included. The ABS process-controlled active battery management system ensures maximum safety, optimum tool performance, maximum operating time and a maximum service life. The high-speed charging technology means short charging times, and for optimum charging and maximum safety the battery is permanently monitored by a charging management system

Features & Benefits


- Universal usability for all Power X-Change rechargeable devices:
- Saving money, protecting the environment, and flexibility
- Longer working time and more power with 2x 18V batteries (= 36V)
- Battery features:
- The ABS process-controlled battery management system stands for
- max. safety, optimum performance, operating time + lifetime
- Freedom of cordless operation: No tangled cables and free working
- High-quality Li-Ion cells means no memory effect,
- low self-discharge and high, constant power
- Current charge level indicated by 3-stage LED display
- Impact protection and good grip thanks to rubber-coated housing
- Trough handle for easy removal
- Housing protected against dust, corrosion and mechanical damage
- Suitable for TWIN-PACK use in power demanding 36V applications
- Charger features:
- Parallel Charging of 2x 18V batteries saves space,
- provides fast + high availability and continuous working
- Quick-charge technology ensures short charging times
- Permanent battery monitoring for optimum charging
- Refresh mode allows deeply discharged batteries to be reactivated
- Maximum safety due to intelligent charge management
- Current information on 6-stage status LED display
- Integrated suspension eyelets for user-friendly wall-mounting



CHARGING TIME OVERVIEW		POWER RANGE (W)									
Ah	1.5	2.0	2.5	3.0	4.0	4.8	2.4	3.0	5.2	6.6	
min	15	20	25	30	40	50	15	20	25	30	min

Technical Data

- Mains supply charger	220-240 V 50-60 Hz
- Voltage output charger	18 V
- Charging time	75min
- Voltage	18 V
- Battery capacity	4000 mAh
- Max. power	900 W
- Amount of batteries	2 Pieces

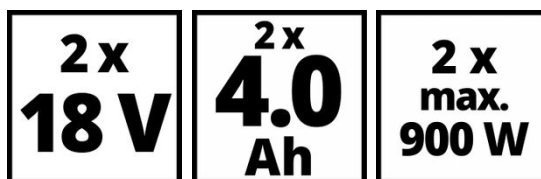

Logistic Data

- Product weight (kg)	0.7674
- Gross weight (kg)	2.2892
- Dimensions single packaging	265 x 85 x 301 mm
- Pieces per export carton	6 Pieces
- Gross weight of export carton	15.7 kg
- Dimensions export carton	540 x 300 x 277 mm
- Container quantity (20"/40"/40"HC)	3474 7482 0