


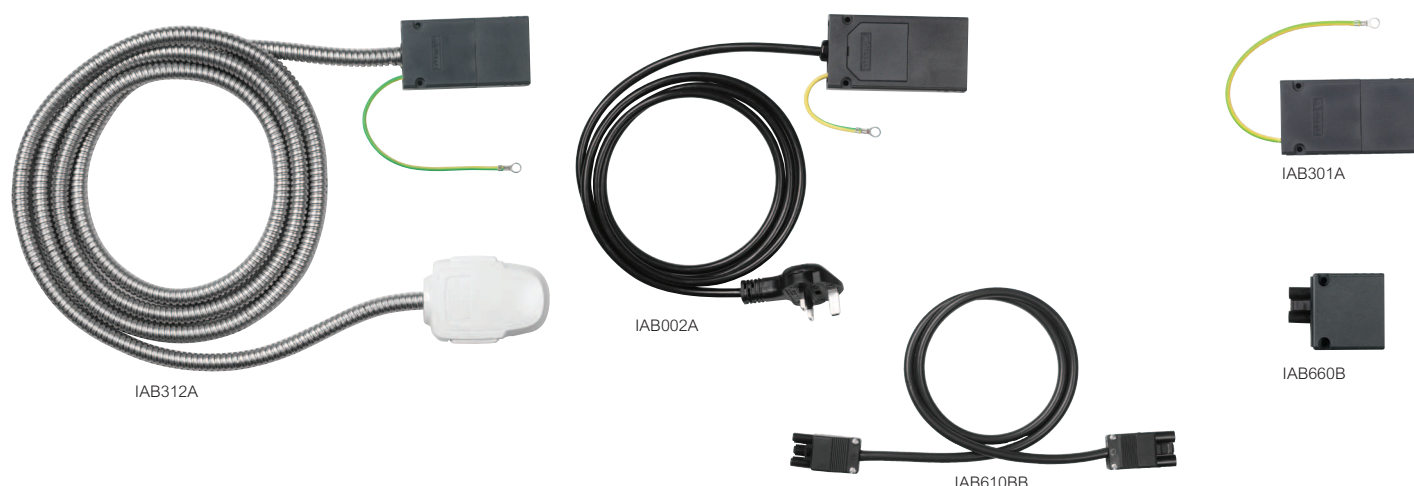

Intersoc-R features fast modular connection with push-fit auto lock mechanism, safe shuttered electrical connections and a robustly designed rigid joint between modules. Available in standard and clean earth versions
Independently approved by Intertek. Complies with BS 5733 and the relevant parts of BS 1363 part 2. Manufactured in an approved ISO 9001 : 2008 facility. Meets the requirements of BS 7671 : 2008 for high integrity earthing (section 543.7)

Pack	Cat. Nos.		Pack	Cat. Nos.	
		32 A pre-wired feed modules			16 A feed modules pre-wired to 13 A fused plug
		Standard earth tap-offs (E24 - White tap-off)			
1	IAB311A	3 m unfused metal tap-off Cat. No. DP1332	1	IAB002A	With 2 m 1·5 mm ² cable
1	IAB312A	5 m unfused metal tap-off Cat. No. DP1532	1	IAB003A	With 3 m 1·5 mm ² cable
1	IAB315A	3 m 13 A fused 543·7 metal tap-off Cat. No. DP1327	1	IAB005A	With 5 m 1·5 mm ² cable
1	IAB316A	5 m 13 A fused 543·7 metal tap-off Cat. No. DP1527			
		Low noise / clean earth tap-offs (E25 - Green tap-off)			16 A rewirable feed modules
1	IAC311A	3 m unfused metal tap-off Cat. No. JP2332	1	IAB201A	Rewirable feed module (for cable)
1	IAC312A	5 m unfused metal tap-off Cat. No. JP2532			
1	IAC315A	3 m 13 A fused 543·7 metal tap-off Cat. No. JP2327			16 A feed units with in-built GST connector
1	IAC316A	5 m 13 A fused 543·7 metal tap-off Cat. No. JP2527	1	IAB660B	Compact feed module with male GST connector
		Auxiliary earth tap-offs (E28 - Red tap-off)	1	IAB201B	Feed module with male GST and earth bond lead
1	IAF311A	3 m unfused metal tap-off Cat. No. YP5332			
1	IAF312A	5 m unfused metal tap-off Cat. No. YP5532			16 A pre-wired connection leads
1	IAF315A	3 m 13 A fused 543·7 metal tap-off Cat. No. YP5327			13 A fused plug pre-wired to GST connector
1	IAF316A	5 m 13 A fused 543·7 metal tap-off Cat. No. YP5527	1	IAB002B	With 2 m 1·5 mm ² cable
			1	IAB003B	With 3 m 1·5 mm ² cable
			1	IAB005B	With 5 m 1·5 mm ² cable
		32 A re-rewirable feed modules			GST to GST connection leads
1	IAB301A	Standard earth (for flexible conduit)	1	IAB610BB	1 m length
1	IAC301A	Low noise (for flexible conduit)	1	IAB620BB	2 m length
			1	IAB630BB	3 m length
		32 A feed units with in-built Neutrik connectors			
1	IAB301E	Standard earth			
1	IAC301E	Low noise			
		32 A tap-offs pre-wired to Neutrik connectors			
		Standard earth tap-offs (E24)			
1	IAB311E	3 m unfused metal tap-off Cat. No. DP1332			
1	IAB312E	5 m unfused metal tap-off Cat. No. DP1532			
1	IAB315E	3 m 13 A fused 543·7 metal tap-off Cat. No. DP1327			
1	IAB316E	5 m 13 A fused 543·7 metal tap-off Cat. No. DP1527			
		Low noise / clean earth tap-offs (E25)			
1	IAC311E	3 m unfused metal tap-off Cat. No. JP2332			
1	IAC312E	5 m unfused metal tap-off Cat. No. JP2532			
1	IAC315E	3 m 13 A fused 543·7 metal tap-off Cat. No. JP2327			
1	IAC316E	5 m 13 A fused 543·7 metal tap-off Cat. No. JP2527			