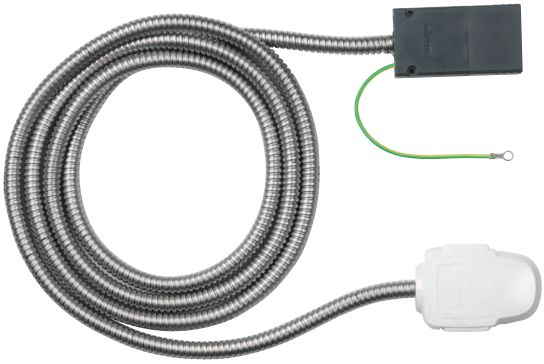
# Intersoc-R™ desk modules

## electrical supply


IAB312A


IAB002A


IAB610BB


IAB301A


IAB660B

Dimensions and technical information **p. 42-45**

Intersoc-R features fast modular connection with push-fit auto lock mechanism, safe shuttered electrical connections and a robustly designed rigid joint between modules. Available in standard and clean earth versions
Independently approved by Intertek. Complies with BS 5733 and the relevant parts of BS 1363 part 2. Manufactured in an approved ISO 9001 : 2008 facility. Meets the requirements of BS 7671 : 2008 for high integrity earthing (section 543·7)

| Pack | Cat. Nos. | 32 A pre-wired feed modules |
|---|---|---|
| | | **Standard earth tap-offs (E24 - White tap-off)** |
| 1 | IAB311A | 3 m unfused metal tap-off Cat. No. DP1332 |
| 1 | IAB312A | 5 m unfused metal tap-off Cat. No. DP1532 |
| 1 | IAB315A | 3 m 13 A fused 543·7 metal tap-off Cat. No. DP1327 |
| 1 | IAB316A | 5 m 13 A fused 543·7 metal tap-off Cat. No. DP1527 |
| | | **Low noise / clean earth tap-offs (E25 - Green tap-off)** |
| 1 | IAC311A | 3 m unfused metal tap-off Cat. No. JP2332 |
| 1 | IAC312A | 5 m unfused metal tap-off Cat. No. JP2532 |
| 1 | IAC315A | 3 m 13 A fused 543·7 metal tap-off Cat. No. JP2327 |
| 1 | IAC316A | 5 m 13 A fused 543·7 metal tap-off Cat. No. JP2527 |
| | | **Auxiliary earth tap-offs (E28 - Red tap-off)** |
| 1 | IAF311A | 3 m unfused metal tap-off Cat. No. YP5332 |
| 1 | IAF312A | 5 m unfused metal tap-off Cat. No. YP5532 |
| 1 | IAF315A | 3 m 13 A fused 543·7 metal tap-off Cat. No. YP5327 |
| 1 | IAF316A | 5 m 13 A fused 543·7 metal tap-off Cat. No. YP5527 |

| Pack | Cat. Nos. | 32 A re-wirable feed modules |
|---|---|---|
| 1 | IAB301A | Standard earth (for flexible conduit) |
| 1 | IAC301A | Low noise (for flexible conduit) |

| Pack | Cat. Nos. | 32 A feed units with in-built Neutrik connectors |
|---|---|---|
| 1 | IAB301E | Standard earth |
| 1 | IAC301E | Low noise |

| Pack | Cat. Nos. | 32 A tap-offs pre-wired to Neutrik connectors |
|---|---|---|
| | | **Standard earth tap-offs (E24)** |
| 1 | IAB311E | 3 m unfused metal tap-off Cat. No. DP1332 |
| 1 | IAB312E | 5 m unfused metal tap-off Cat. No. DP1532 |
| 1 | IAB315E | 3 m 13 A fused 543·7 metal tap-off Cat. No. DP1327 |
| 1 | IAB316E | 5 m 13 A fused 543·7 metal tap-off Cat. No. DP1527 |
| | | **Low noise / clean earth tap-offs (E25)** |
| 1 | IAC311E | 3 m unfused metal tap-off Cat. No. JP2332 |
| 1 | IAC312E | 5 m unfused metal tap-off Cat. No. JP2532 |
| 1 | IAC315E | 3 m 13 A fused 543·7 metal tap-off Cat. No. JP2327 |
| 1 | IAC316E | 5 m 13 A fused 543·7 metal tap-off Cat. No. JP2527 |

| Pack | Cat. Nos. | 16 A feed modules pre-wired to 13 A fused plug |
|---|---|---|
| 1 | IAB002A | With 2 m 1·5 mm$^2$ cable |
| 1 | IAB003A | With 3 m 1·5 mm$^2$ cable |
| 1 | IAB005A | With 5 m 1·5 mm$^2$ cable |

| Pack | Cat. Nos. | 16 A rewirable feed modules |
|---|---|---|
| 1 | IAB201A | Rewirable feed module (for cable) |

| Pack | Cat. Nos. | 16 A feed units with in-built GST connector |
|---|---|---|
| 1 | IAB660B | Compact feed module with male GST connector |
| 1 | IAB201B | Feed module with male GST and earth bond lead |

| Pack | Cat. Nos. | 16 A pre-wired connection leads |
|---|---|---|
| | | **13 A fused plug pre-wired to GST connector** |
| 1 | IAB002B | With 2 m 1·5 mm$^2$ cable |
| 1 | IAB003B | With 3 m 1·5 mm$^2$ cable |
| 1 | IAB005B | With 5 m 1·5 mm$^2$ cable |
| | | **GST to GST connection leads** |
| 1 | IAB610BB | 1 m length |
| 1 | IAB620BB | 2 m length |
| 1 | IAB630BB | 3 m length |