


Product Data Sheet

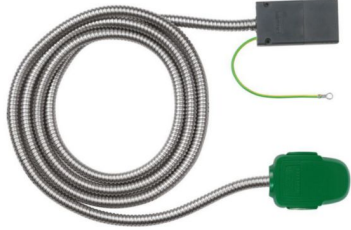

ELECTRAK

Intersoc-R 32A Feed Module Pre-Wired to Low Noise Clean Earth 32A Unfused High Integrity Tap-Off 7m

REF. IAC313A | EAN. 5012774027539

[> Link to e-catalog product sheet](#)

Technical characteristics

Connection 1	Other
Connection 2	Other
Connector system system-oriented	Yes
Number of cores	3
Nominal cross section conductor	4 mm ²
Length	7 m
Material outer sheath	Other
Temperature resistance	0-90 °C
Nominal current	32 A
Nominal voltage	250-250 V
Frequency	50-60 Hz

Colour outer sheath	Other
Spiralized cable	No
With protective conductor	Yes
Degree of protection (IP)	Other
Oil resistant according to EN IEC 60811-404	No
With cord switch	No
Outer diameter approx.	16 mm
Reaction-to-fire according to EN 13501-6: Class	None
Reaction-to-fire according to EN 13501-6: Smoke production	None
Reaction-to-fire according to EN 13501-6: Flaming droplets/particles	None
Reaction-to-fire according to EN 13501-6: Acidity	None

Documents

Catalogue pages

powering-the-workplace-2023-042.pdf | PDF (0.33Mo)

Agreements & certificates

LGRP-00995-V01.01-EN.pdf | PDF (0.61Mo)