



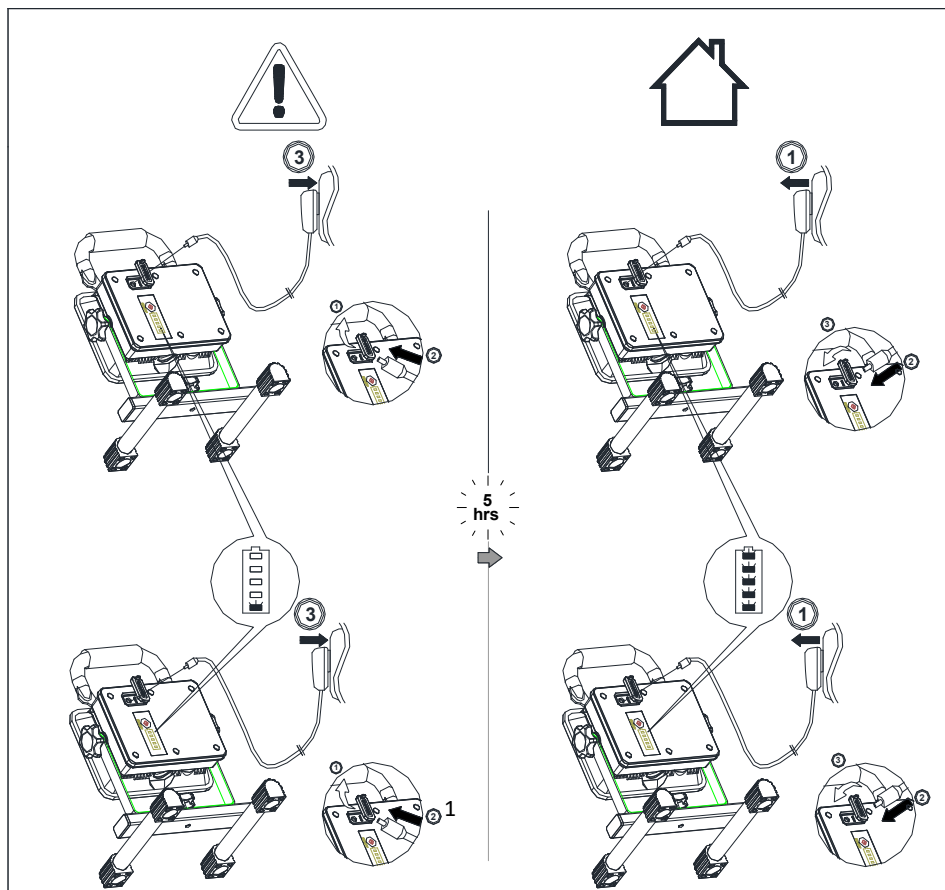

Rechargeable LED Work light

Type: GX-SLR20W

SECTION ONE: INSTALLATION AND FUNCTION

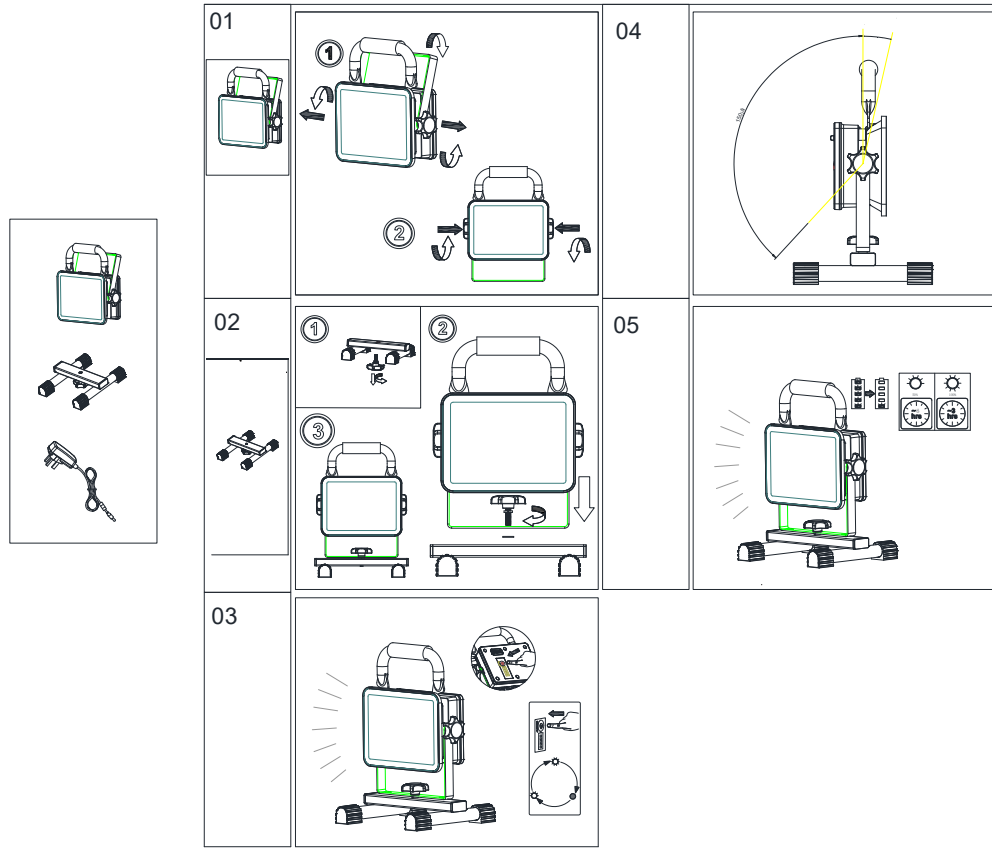

1. The light has a button to control the light: Press the button, the light will change the brightness 100%-50%-OFF-100%
2. The light has two charge input: one is the 8.4V/1A adapter(supplied), another is 5V/1A Micro USB input







SECTION TWO

SITING INSTRUCTION

- Check the pack and make sure you have all of the parts listed.
- Decide on the appropriate location for your product.
- This product contains glass so care must be taken when fitting or handling to prevent personal injury or damage to the product.
- This product is suitable for outdoor use.
- Ensure the cover is fully fitted to the d.c. socket to ensure its IP65 rating.
- This product is rated IP65. It is suitable for outdoor use but should not be immersed in water or subjected to standing water.
- Warning: This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. It is recommend to use the product at ambient temperature above 0°C only.
- The light source of this luminaire is non user replaceable; The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- Caution: Do not stare directly at the LED light beam.
- Check the cable, plug and the unit for any damage, if damaged DO NOT use the luminaire .
- Do not use lamp whilst charging.
- If the product is not used for over 3 months, it must be recharged before use.
- Screw must be locked tight
- Never modify the luminaire, there are no user serviceable parts inside.
- Repairs should only be carried out by a suitably qualified person.
- Regular cleaning of luminaires should be carried out at regular intervals not only to ensure good optical performance but also ensure that dirt does not accumulate to such an extent as to impair the electrical or thermal safety of the fitting. This should be done with the luminaire switched off/isolated and a soft damp cloth should be used, do not use any chemicals or abrasives.

SECTION THREE

BATTERY WARNING



SECTION FOUR

SPECIFICATIONS

Model No.:	GX-SLR20W
Power	20W LED
Lumen output	1400LM
Colour Temp:	5000K
Charging time	5Hours
Run time	3Hours
Battery	7.4V/3.6AH Li-ion
AC/DC Adapter	Input: AC 100-240 50/60HZ Output: DC 8.4V/1A
USB Input	MAX. 5V/1A
Protection class (excluding Adaptor/ charger)	IP65
	The minimum distance from lighted object is 0.5m.
Weight(N.W.)	Approx. 1.5KG
Dimension(WxDxH)	270.5x186x166mm

Light Source Maintenance:

The light source of this luminaire is not replaceable; in case the light source needs to be replaced (e.g. at the end of its life), the whole luminaire shall be replaced.

Environment:

Please do not dispose the packaging as unsorted waste, use the recycling facilities provided by your local authorities.

When the light fitting comes to the end of its life or you choose to update or upgrade by replacing it, then do not dispose with your normal household waste. Please recycle where facilities exist. When you need to dispose of this fitting, check with your retailer or local authority for suitable options.

Due to our policy of continuous improvement we reserve the right to change specification without prior notice. Errors and omissions excepted. These instructions have been carefully checked prior to publication. However, no responsibility can be accepted by Engex for any misinterpretation of these instructions.

Engex

10 Sandersons Way,
Blackpool, FY4 4NB

Email: enquiries@engex-uk.co.uk

Web: www.engex-uk.co.uk



