DATASHEET


3 Wire Outdoor Standard
Pushbutton Time Delay Switch - IP66

Product Ref: **F4P3WPB/IP66**

Technical Features:

- Easy to install and operate
- 3 wire (Live, Switch live and Neutral)
- 10A rated regardless of load type
- Neutral required
- 16 Timer settings from 2 mins to 1 hour
- Can be interlinked with other F4P3WPB/IP66 Outdoor timers for multi-way switching
- IP66 rated outdoor backboxes provided to maintain IP rating which must be used
- UV Resistant
- Please note: F4PPFCC capacitor will often be required when switching certain types of loads



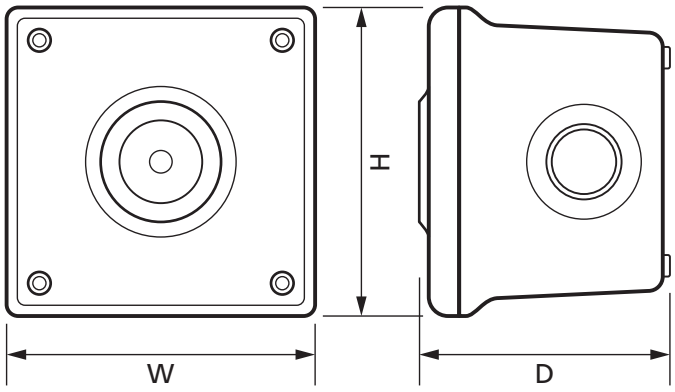

Product Specification

Cancellation Function	**Yes**
Colour	**White**
Compliance	**UKCA, CE**
Current Rating	**10A**
Frequency	**50/60Hz**
Guarantee	**6 Years**
IP Rating	**IP66**
Material	**Flame Retardant ABS**
Mounting	**Wall**
Number of Wire Connections	**3**
Power Consumption	**0.7W**
Re-Trigger Function	**Yes**
Standards	**BS EN 60669, BS EN 60669-1, BS EN 60669-2-1, BS EN 60669-2-3**
Suitable For	**Resistive, Incandescent, Fluorescent, Compact Fluorescent and LED Loads**
Terminal Capacity	**2.5mm²**
Timer Range	**2 - 60mins**
Type	**Pushbutton**
Voltage Rating	**230V**
Weight	**0.200kg**
Depth	**68mm**
Height	**85mm**
Width	**85mm**

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: **+44 (0)1302 765 570** • f4p-products.com • @F4Pinfo