


3 Wire Ceiling Mount PIR Time Delay Switch

Product Ref: **F4PCPIR**

Technical Features:

- Easy to install and operate
- 3 wire (Live, Switch live and Neutral)
- 10A rated regardless of load type
- Neutral required
- 8 Timer settings from 10 seconds to 1 hour
- Lux and sensitivity adjustment
- Can be interlinked with other F4PCPIR timers for multiple switching
- Red signal LED
- Walk Test Mode - 10 seconds
- Complete with surface mount box and interchangeable chrome/white bezel
- UV Resistant
- Please note: F4PPFCC capacitor will often be required when switching certain types of loads

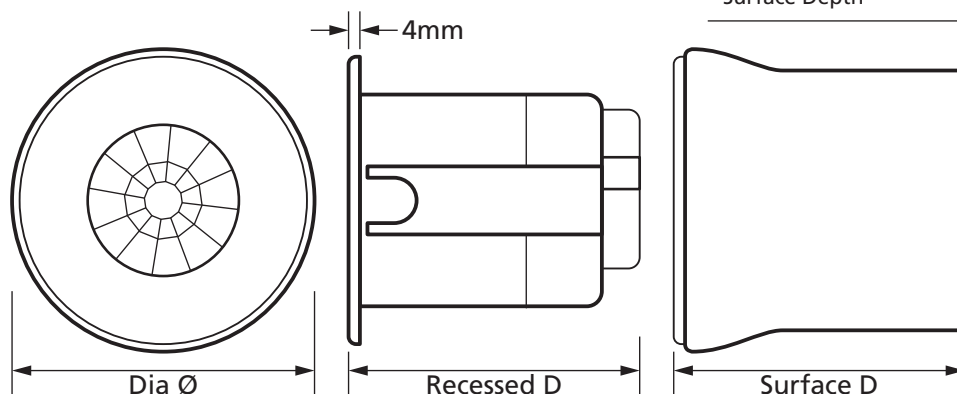

Product Specification

Cancellation Function	No
Colour	White
Compliance	UKCA, CE
Current Rating	10A
Cut Out	64mm Ø
Detection Angle	360°
Detection Range	7-10m
Frequency	50/60Hz
Guarantee	6 Years
Material	Flame Retardant ABS
Mounting	Ceiling (Flush or Surface)
Mounting Height	2.4m
Number of Wire Connections	3
Power Consumption	0.9W
Re-Trigger Function	No
Standards	BS EN 60669, BS EN 60669-1, BS EN 60669-2-1, BS EN 60669-2-3
Suitable For	Resistive, Incandescent, Fluorescent, Compact Fluorescent and LED Loads
Terminal Capacity	2.5mm ²
Timer Range	10 secs - 1 hr
Type	PIR
Voltage Rating	230V
Weight	0.199kg
Recessed Diameter Ø	77mm
Recessed Depth	72mm
Surface Diameter Ø	80mm
Surface Depth	72mm

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 765 570 • f4p-products.com • X@F4Pinfo