


Ø19.0mm - 10.0mm Heatshrink Pack

Product Ref: **F4PHSP190100**


Technical Features:

- Ø19.0 - 10.0mm Flat Sleeving
- Pack contains: 3 x 5 coloured Sleeves (225mm long)
- Colours included: Black, Blue, Brown, Grey, Green/Yellow
- Heat shrinkable at 2:1 Ratio
- Colour selection according to IET cable colour coding
- Shrink with hot airgun or naked flame
- Flame retardant - UL VW-1, F-mark
- Flexible with excellent insulation properties
- Resistant to common fluids and solvents
- RoHS Compliant

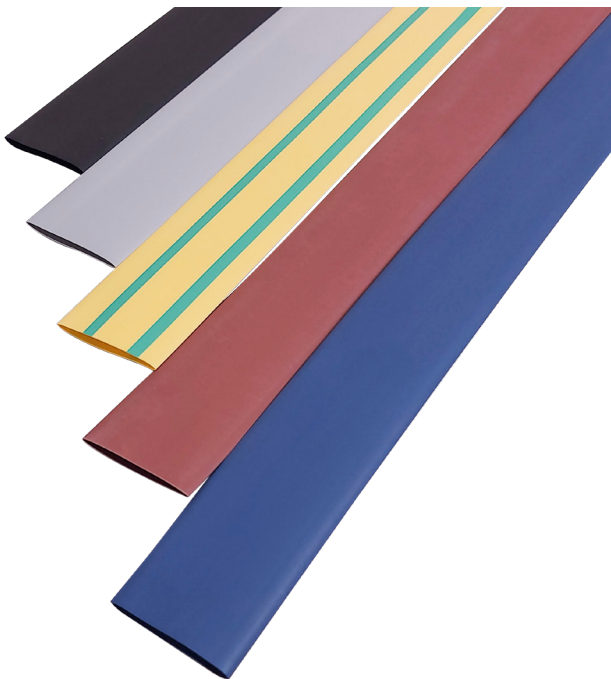

Product Specification

Colour	Mixed
Compliance	RoHS
Dielectric Strength	≥ 20kV/mm
Flame Retardant	Yes
Guarantee	1 Year
Operating Temperature Range	-55° to +125°C
Pack Content	3 x Ø19.0 - 10.0mm Black Flat Sleeving 3 x Ø19.0 - 10.0mm Grey Flat Sleeving 3 x Ø19.0 - 10.0mm Brown Flat Sleeving 3 x Ø19.0 - 10.0mm Blue Flat Sleeving 3 x Ø19.0 - 10.0mm Green/Yellow Flat Sleeving
Shape	Flat
Shrink Ratio	2 : 1
Shrink Temperature Range	70° to 100°C
Standards	UL VW-1, F-mark
Suitable For	Electrical Insulation and Bonding of Cables and Connectors, as well as Corrosion Proofing Metallic Rods, Tubes and Aerials
Tensile Strength	≥ 14Mpa
Volume Resistivity	> 1 x 10 ¹⁴ ohm cm
Weight	0.131kg
Diameter Ø	19mm
Maximum Diameter	19.0mm
Minimum Diameter	10.0mm
Length	225mm

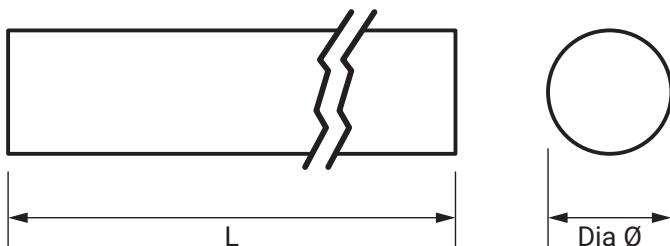

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 765 570 • f4p-products.com • ✉@F4Pinfo