



firesafe
fire safety equipment

FSAV6N


CONVENTIONAL WHITE/RED PLATFORM BASE SOUNDER VISUAL INDICATOR

The FSAV6N combined platforms sounder/visual indicator device provides full 360° visibility via its high intensity LED array with a flash rate of once per second. Including the choice of 32 tones, supplied standard with a clear lens but other colours available to order with a selection of red, amber or blue lens choice. The unit has been accurately designed to accommodate the Firesafe range of detectors and most leading detector brands. A cover plate is also available to order allowing this product to be converted into a stand alone sounder visual indicator device.



Note: Optional cover plate available if needing to utilise as a stand alone sounder visual indicator - FSA6NC

Sound Level	Low	Med	High
Sound Output - @ 1 metre	87dB	90dB	93dB
Current Consumption @ 24Vdc	8.0mA	9.3mA	11.5mA
Voltage Range	18 - 30V DC		
Number of Tones	32		
Operating Frequency	440Hz to 2900Hz		
IP Rating	IP21C		
Temperature Range	- 20°C to + 70°C		
Weight (per unit packed)	270g		

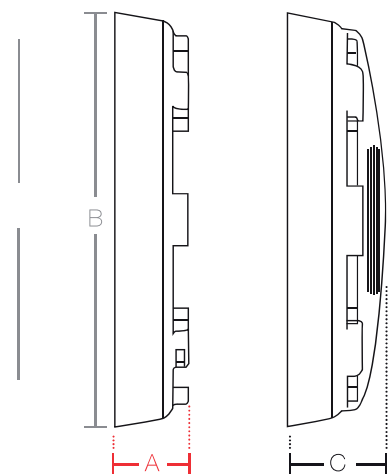

FSAV6N Dimensions:

A: 25mm B: 116mm C: 34.54mm

