


Technical Data Sheet	DS534-3
Product Description	Straight, external thread, Stainless Steel, food contact and hygienic conduit fitting for use with LPC conduits
Product Range	LPC - C - FG Type fitting (Metric Threads)

FLEXICON

FLEXIBLE CONDUIT SOLUTIONS

Roman Way, Coleshill
Birmingham, B46 1HG
(t) +44 (0)1675 466900
(w) www.flexicon.uk.com
(e) sales@flexicon.uk.com

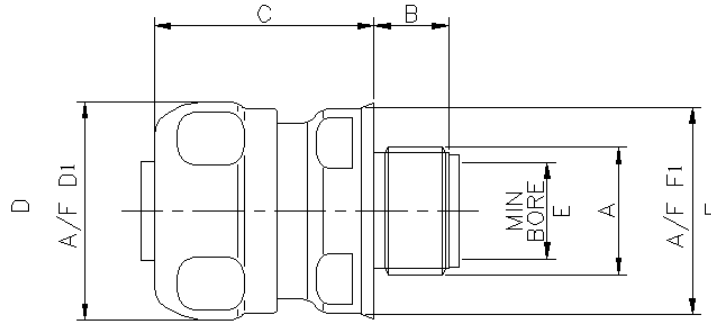

Material
Body & Nut
Stainless Steel (Grade 316)

Insert
NPB

Face Seal & Nut Seal
Polyester elastomer

Conduit seal and insulated throat
Nylon PA6

Colour
Stainless steel
Self colour

All plastic parts
Blue

Fire Performance

Low Fire Hazard - Halogen, Sulphur & Phosphorous Free



IP Rating



Applications

Suitable for knockouts or threaded entries. Stainless Steel compression fitting comprising of nut, insert and nylon compression seal. The insert is manufactured in machined nickel plated brass to facilitate easy assembly and re-use. Also ensures high mechanical strength.

Features

- High tensile strength
- Oil resistant
- Corrosion resistant
- For use with all LPC conduits
- Conforms to EN 61386
- Designed in accordance with EN1672-2 and EN ISO 14159

Temperature Performance

-50°C to +135°C

Conduit Size	Part No.	Metric Thread	Dimension (mm)						
			A	B	C	D	D1	E	F
12	LPC12-M12-C-FG	M12 X 1.5	10.0	30.5	26.7	25.0	8.6	23.0	21.0
16	LPC16-M16-C-FG	M16 X 1.5	12.0	33.6	31.0	29.0	10.7	29.0	27.0
20	LPC20-M20-C-FG	M20 X 1.5	12.0	34.0	34.0	32.0	14.5	32.0	30.0
20	LPC20-M20ST-C-FG	M20 X 1.5	8.0	34.0	34.0	32.0	14.5	29.0	27.0
25	LPC25-M25-C-FG	M25 X 1.5	14.0	35.3	40.0	38.0	18.7	38.0	36.0
32	LPC32-M32-C-FG	M32 X 1.5	15.0	38.7	47.5	44.5	24.6	44.5	42.0
40	LPC40-M40-C-FG	M40 X 1.5	16.0	42.4	59.0	56.0	32.7	55.0	52.0
50	LPC50-M50-C-FG	M50 X 1.5	16.0	46.5	65.0	62.0	37.7	62.0	59.0
63	LPC63-M63-C-FG	M63 X 1.5	16.0	46.5	75.9	73.7	49.0	75.0	72.0

Compliance, Approvals & Accreditation



EN 61386 Classification Available on request

Designed in accordance with EN1672-2 and EN ISO 14159

Typical Applications



Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.