


CIRCULAR DOWNLIGHT 24W LED Low Profile Panel

Product Ref: **FCD24**



Technical Features:

- Low profile ideal for shallow ceiling voids
- Polycarbonate UV stabilised diffuser
- Pre-wired plug and play driver
- Optional emergency pack available
- Beam angle: 120°
- LED Lifetime: 25,000 hrs (L70/B50)
- CRI: 80
- Hg: 0mg

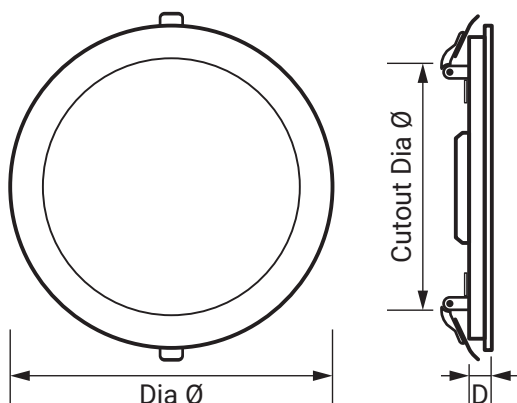

Product Specification

Beam Angle	120°
CCT	4000K Cool White
Class	Class II
Colour	White
Compliance	UKCA, CE
Energy Rating	F
Frequency	50/60Hz
Guarantee	2 Years
IP Rating	IP20
Lamp Life (L70/B50)	25,000 Hours
Lumens Output Mains	2500lm
Material	Polycarbonate body
Mounting	Recessed
Operating Temperature	-20°C - +40°C
Ra	≥ 80
Suitable for	Indoor use
Supplied with	White Trim
Voltage Rating	220-240V ~ 50/60Hz
Wattage	24W
Weight	0.550kg
Cut Out Ø	280mm
Depth	27mm
Diameter Ø	298mm

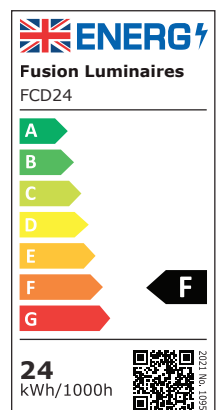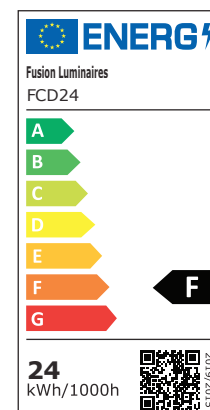

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 769 966