

24W LED Circular Downlight Colour Switchable





Product Ref: **FCD24CC**

Technical Features:

- Low profile ideal for shallow ceiling voids
- Polycarbonate UV stabilized diffuser
- Pre-wired plug and play driver
- CCT colour select function: 3000K (CW) / 4000K (WW) / 6500K (DW)
- Beam Angle: 120°
- LED Lifetime: 25,000 hours (L70/B50)
- CRI: >80
- Hg: 0mg
- Optional emergency pack available

Product Specification

Beam Angle	120°
CCT	Selectable - 3000/4000/6500K
Class	Class II
Colour	White
Compliance	UKCA, CE
CRi	80
Dimmable	No
Energy Rating	F
Frequency	50/60Hz
Guarantee	3 Years
IP Rating	IP20
Lamp Life (L70/B50)	25,000 Hours
Lumens Output Mains	2550lm
Material	Polycarbonate body
Mounting	Recessed
Operating Temperature	-20°C - +40°C
Suitable for	Indoor use
Voltage Rating	220-240V ~ 50/60Hz
Wattage	24W
Weight	0.570kg
Cut Out Ø	280mm
Depth	25mm
Diameter Ø	298mm

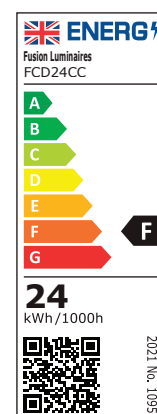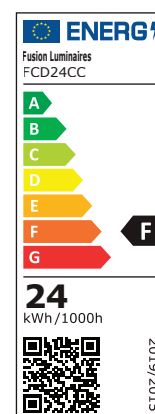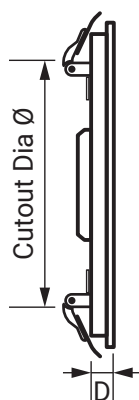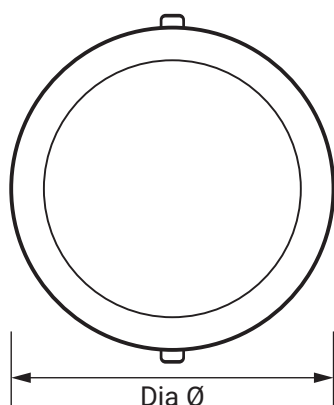

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 769 966