


DOME II

8/12/16/20W LED Tri-Colour Emergency Bulkhead

Product Ref: **FDOMECCWE3**

Technical Features:

- Plastic body and polycarbonate diffuser
- Wattage selectable (8W / 12W / 16W / 20W)
- CCT selectable (3000K / 4000K / 6500K)
- Plug-and-play component arrangement for ease of maintenance
- Hinged LED Gear Tray with locking catch
- Up to 2100 Lumens
- Maintained emergency (3hr/180mins)
- Push-fit (loop-in/loop-out) terminal block
- Side and rear 20mm cable entry points
- Twist & Lock diffuser and white clip-on bezel supplied
- Optional clip-on bezels available

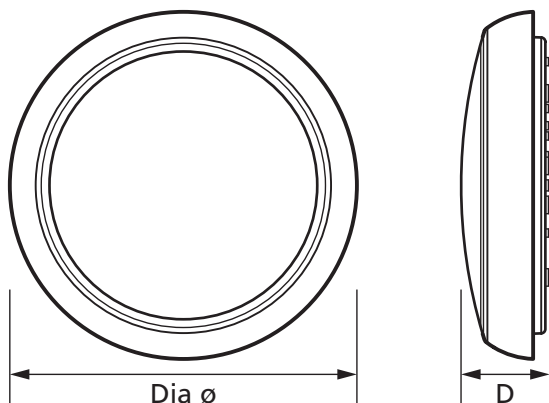

Product Specification

Beam Angle	115°
Class	Class II
Colour	White
Colour Temperature	Selectable - 3000K WW / 4000K CW / 6500K DW
Compliance	UKCA, CE
CRI	80
Emergency	3 Hours / 180 Mins - Maintained
Emergency Output	80lm
Frequency	50~60Hz
Guarantee	2 Years
IK Rating	IK08
IP Rating	IP65
Lamp Life	50000 hours
Lens Colour	Opal
Lumens	Up to 2100lm
Material	Polycarbonate
Mounting	Surface
Operating Temperature	0 - 40°C
Standards	EN60598-1 EN60598-2-1
Supplied With	White Bezel
Voltage Rating	220-240V
Wattage	Selectable 8W / 12W / 16W / 20W
Weight	0.795kg
Depth	77mm
Diameter Ø	320mm

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 769 966 • fusion-luminaire.co.uk