

## NON-CORROSIVE FITTING

55W 6ft LED High Output Emergency NCF



Product Ref: **FNCF6HOE3**

### Technical Features:

- Manufactured from self-extinguishing V2 polycarbonate
- Polycarbonate UV stabilised diffuser
- Stainless steel diffuser clips
- Gear tray suspension cords included
- Surface and suspension mounting options (accessories supplied)
- Push fit (loop-in/loop-out) terminal blocks
- Maintained emergency (3hr/180mins)

## Product Specification

Attachment Type	Polycarbonate Diffuser
Average Life	50000 hours
Beam Angle	120°
Class	Class 1
Colour	Grey
Colour Temperature	4000K
Compliance	UKCA, CE
CRI	>80
Emergency	3 Hours - Maintained
Fixing Centres	1355mm
Frequency	50-60Hz
Guarantee	2 Years
IK Rating	IK08
IP Rating	IP65
Lens Colour	Frosted
Lumens	6600lm
Material	Polycarbonate
Mounting	Surface/Suspended
Operating Temperature	-20 - +40°C
Voltage Rating	230V
Wattage	55W
Weight	2.560kg
Height	83mm
Length	1800mm
Width	96mm

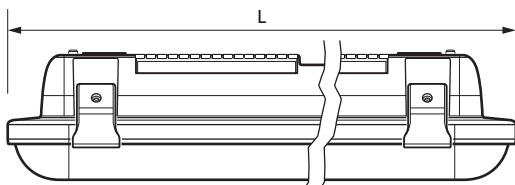

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 769 966