


WALL PACK

20W LED Tri-Colour C/W Photocell

Product Ref: **FWPCCPC**

Technical Features:

- CCT colour select function (WW / CW / DW)
- Lumen output: 1500lm (3000K) WW, 1600lm (4000K) CW, 1550lm (6500K) DW
- Die-cast aluminium black powder coated body and polycarbonate diffuser
- Push-fit (loop-in / loop-out) terminal block
- Cable entry points (2 x M16)
- Built-in photocell
- Beam angle: 115°
- LED lifetime: 50,000 hrs (L70 / B50)

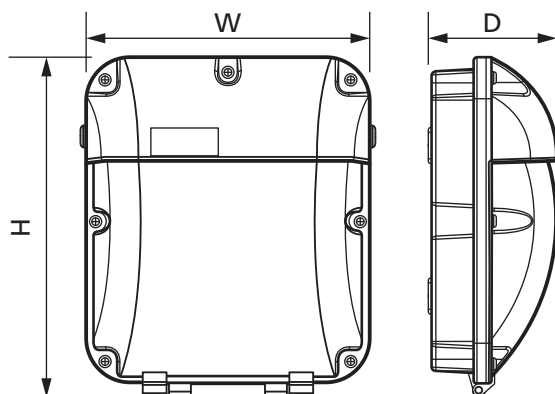

Product Specification

Beam Angle	115°
Colour	Black
Colour Temperature	Selectable - 3000/4000/6500K
Compliance	UKCA, CE
CRI	80
Dimmable	No
Finish	Powder Coated
Frequency	50/60Hz
Guarantee	5 Years
IK Rating	IK06
IP Rating	IP65
Lamp Life	50,000 hours
Lens Colour	Opal
Material	Die-Cast Aluminium / Polycarbonate
Mounting	Wall
Operating Temperature	-10 - +40°C
Sensor	Photocell
Voltage Rating	240V
Wattage	20W
Weight	0.870kg
Depth	82mm
Height	221mm
Width	207mm

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 769 966