



# MASTER PL-L 4 Pin

## MASTER PL-L 18W/840/4P 1CT/25

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 2 parallel fluorescent tubes

### Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General Information		Lamp Current (Nom)	
Cap-Base	2G11	0.375 A	
Flux measurement reference	Sphere	Controls and Dimming	
Life to 50% Failures (Nom)	15,000 h	Dimmable	Yes
Light Technical		Mechanical and Housing	
Color Code	840 [CCT of 4000K]	Net Weight (Piece)	60.900 g
Luminous Flux	1,200 lm	Approval and Application	
Color Designation	Cool White (CW)	Energy Efficiency Class	G
Chromaticity Coordinate X (Nom)	0.38	Mercury (Hg) Content (Max)	2 mg
Chromaticity Coordinate Y (Nom)	0.38	Mercury (Hg) Content (Nom)	2.0 mg
Correlated Color Temperature (Nom)	4000 K	Energy Consumption kWh/1000 h	18 kWh
Luminous Efficacy (rated) (Nom)	67 lm/W	EPREL Registration Number	423263
Color rendering index (CRI)	80	Product Data	
Operating and Electrical		Order product name	MASTER PL-L 18W/840/4P 1CT/25
Power Consumption	18.0 W		

# MASTER PL-L 4 Pin

Full product name	MASTER PL-L 18W/840/4P 1CT/25
Full product code	871150070669040
Local code description	PLL18W8404P
Order code	927903008470
Material Nr. (12NC)	927903008470
Local order code	PLL18W8404P


Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500706690
Numerator - Packs per outer box	25
EAN/UPC - Case	8711500610652

## Dimensional drawing



Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-L 18W/840/4P 1CT/25	39.0 mm	18.0 mm	194.2 mm	220 mm	226.6 mm

## Photometric data

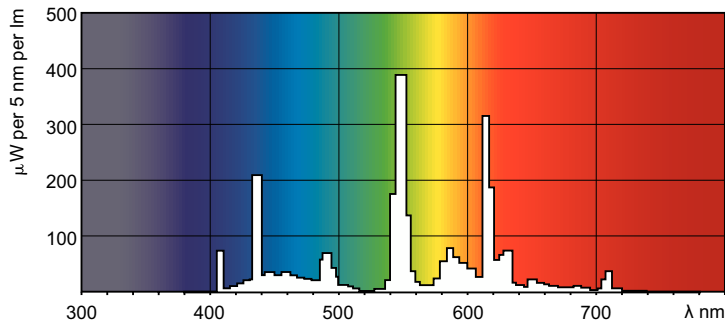

Spectral Power Distribution Colour - MASTER PL-L 18W/840/4P 1CT/25

