GREEN BROOK ELECTRICAL


Installation Instructions for Tamperproof Room Thermostat & Frostat - TH90T-C & TH90FT-C

Bimetallic room thermostats for heating and air conditioning installations.

Important: *This product should be installed by a competent person and in accordance with the current IET Wiring Regulations. If in doubt consult a qualified electrician.*


We suggest to install the thermostat about 1.5m from the floor, and away from any heat source.

TYPE

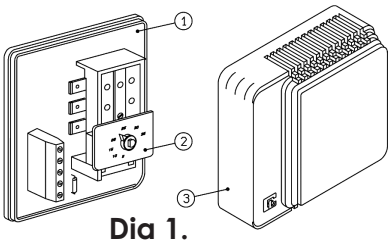


Dia 1.

Dia 1
1. **Base**
2. **Index/dial**
3. **Cover**

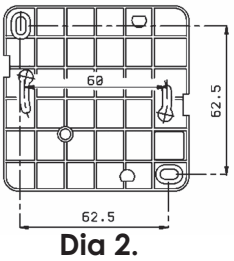

Dia 2.

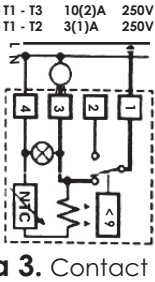

Dia 3. Contact (change-over) arrangement

The fixings of the room thermostat/frostat can be done by placing the unit directly on the wall using wallplugs and screws, please see Dia 2.

Connect wiring as shown on Dia 3.

IMPORTANT: Accelerating resistance with voltage to 230V. This thermostat is provided with an accelerating resistance which must be connected in order to obtain the correct performance. Terminal 4 has to be connected to the neutral according to the diagram shown on the cover.

TECHNICAL INFROMATION

Breaking Capacity:	
On opening contact-	10A / 250V AC (ohmic load)
On closing contact-	3A / 250V AC (ohmic load)
Differential:	0.5°C
IP rating:-	IP20

GUARANTEE
Your GreenBrook Room Thermostat TH90T-C & Room Frostat TH90FT-C is guaranteed for 1 year from the date of purchase. This is in addition to your statutory rights.

PLEASE KEEP THESE INSTRUCTIONS SAFE FOR FUTURE REFERENCE

GREEN BROOK ELECTRICAL
WEST ROAD . HARLOW
ESSEX . CM20 2BG . UK
info@greenbrook.co.uk
www.greenbrook.co.uk

CE

Issue no: 704738