



Order Code :


74 2X40

Hartland Satin Steel Push On/Off Dimmer 2 gang 2 way 400W max 40W min. Standard Insert will be Satin Steel.

Attributes


Primary Range	Hartland
Insrt	2X40
Plate material	Metal
Size (single) height	88mm
Size (single) width	88mm
Size (single) depth	5mm
Box fixing hole centres	60.3mm
Minimum wall box depth	35mm
Wattage	300W per gang
Current rating	1.66 Amps per gang
Voltage	220/250V AC
Max load	300W resistive per gang Min Load 40W
IP rating	IP2XD
Switched Poles	Single
Terminal Capacity 1	2 x 1mm2
Terminal Capacity 2	2 x 1.5mm2
Earth Terminal Capacity 1	5 x 1mm2
Earth Terminal Capacity 2	4 x 1.5mm2
Earth Terminal Capacity 3	3 x 2.5mm2
Earth Terminal Capacity 4	1 x 4mm2 Multi-Strand
Earth Terminal Capacity 5	1 x 6mm2
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5Å° to +40Å°C
Recommended Location	Indoor use only
Max installation Altitude	2000m
BS EN ISO Standard	BS EN 60669-2-1
Additional Notes :	Tungsten filament GU10 lamps must be branded with a fuse base. When using mains voltage halogen lamps-dimmers should be de-rated by 25%. When dimming LED lamps de-rated by 75% - please contact our Technical for compatibility.
Patents And Trademarks	Trade Mark No. 2344778

Dimmer Wiring

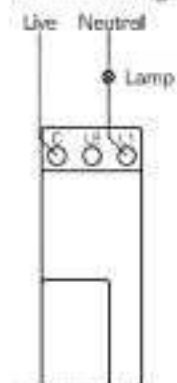

Note: When using as a One Way Dimmer the L2 terminal is not used

Loop In Loop Out: Two Way Switching

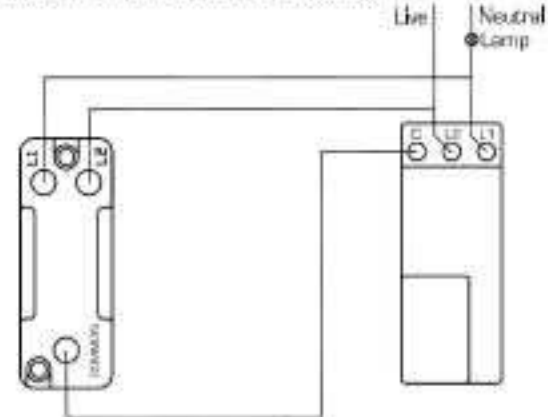

Note: When switching from more than one position a two way dimmer can only be used in conjunction with switches, i.e. only one dimmer per circuit.