

PURO G4


PURO14W-300R
SAP CODE: 2002372

The Puro G4 LED oyster light is designed to provide smooth light distribution and tritone colour capabilities. Available in different sizes and the option of combining a sensor and/or emergency option, the PURO G4 is a perfect all-round oyster light.


APPLICATIONS

Bedrooms, Lounge Room, Dining Area, Laundry, Hallways, Staircase, Walk-in Wardrobes, Garage, Education Facilities, Hotel Common Areas, Hotel Rooms, Storage Rooms, Temporary Installations

DIMENSION DIAGRAMS

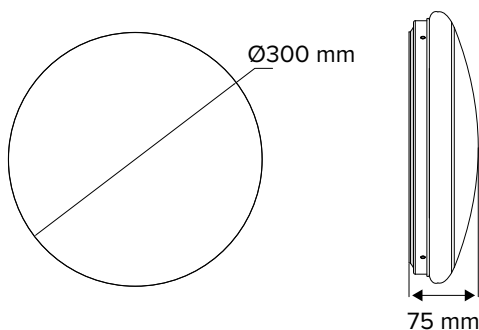

PHOTOMETRIC DIAGRAM

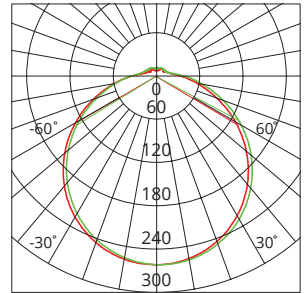

Unit: cd
 - C0/180 118.5deg
 - C90/270 119.5deg

Photometric diagram shown is for 4000K output.

KEY INFORMATION

Power	8 W 10 W 11 W 14 W
Lumen Output	680 / 752 / 730 lm 890 / 979 / 950 lm 980 / 1082 / 1050 lm 1200 / 1391 / 1350 lm
Mounting Type	Surface Mount
Dimming Type	Phase-Cut Dimmable (Trailing Edge, 10-100%)
Body Colour	White
IP Rating	IP54
IK Rating	IK04
Operating Ambient Temp.	-20 to 45°C
Connection Type	PA14 Terminals
Driver	Integral
Warranty	5 yrs

PHOTOMETRIC

Efficacy	91 / 100 / 97 lm/W 94 / 103 / 100 lm/W 89 / 98 / 95 lm/W 86 / 99 / 96 lm/W
CCT	3000 / 4000 / 5700 K
CRI	> 80
SDCM	< 5
UGR	N/A
Beam Angle	120°
Flicker-Free	No
Projected Lifespan	>50,000hrs @ Ta 25°C (L80)

ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Power Factor	> 0.9
Electrical Classification	Class I
Surge Protection	Overload / Short Circuit

OTHERS

Body Material	Steel
Diffuser Material	PMMA
Rebate Scheme Approvals	N/A
Weight	0.54 kg
Dimensions	Ø300 x 75 mm