

PURO G4


PURO24W-400R
SAP CODE: 2002376

The Puro G4 LED oyster light is designed to provide smooth light distribution and tritone colour capabilities. Available in different sizes and the option of combining a sensor and/or emergency option, the PURO G4 is a perfect all-round oyster light.


APPLICATIONS

Bedrooms, Lounge Room, Dining Area, Laundry, Hallways, Staircase, Walk-in Wardrobes, Garage, Education Facilities, Hotel Common Areas, Hotel Rooms, Storage Rooms, Temporary Installations

DIMENSION DIAGRAMS

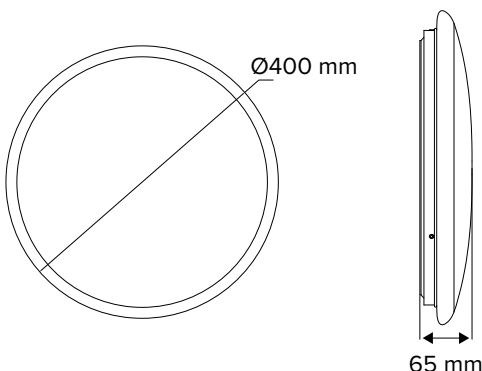

PHOTOMETRIC DIAGRAM

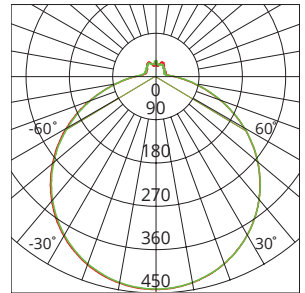

Unit: cd
 - C0/180 117.1deg
 - C90/270 116.9deg

Photometric diagram shown is for 4000K output.

KEY INFORMATION

Power	11 W 14 W 22 W
Lumen Output	1080 / 1185 / 1150 lm 1360 / 1494 / 1450 lm 2125 / 2318 / 2250 lm
Mounting Type	Surface Mount
Dimming Type	Phase-Cut Dimmable (Trailing Edge, 10-100%)
Body Colour	White
IP Rating	IP54
IK Rating	IK04
Operating Ambient Temp.	-20 to 45°C
Connection Type	PA14 Terminals
Driver	Integral
Warranty	5 yrs

PHOTOMETRIC

Efficacy	98 / 108 / 105 lm/W 97 / 107 / 104 lm/W 97 / 105 / 102 lm/W
CCT	3000 / 4000 / 5700 K
CRI	> 80
SDCM	< 5
UGR	N/A
Beam Angle	120°
Flicker-Free	No
Projected Lifespan	>50,000hrs @ Ta 25°C (L80)

ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Power Factor	> 0.9
Electrical Classification	Class I
Surge Protection	Overload / Short Circuit

OTHERS

Body Material	Steel
Diffuser Material	PMMA
Rebate Scheme Approvals	N/A
Weight	0.83 kg
Dimensions	Ø400 x 65 mm