

# PURO G4

**PURO25W400R-EM**


SAP CODE: 2001989

The Puro G4 LED oyster light is designed to provide smooth light distribution and tritone colour capabilities. Available in different sizes and the option of combining a sensor and/or emergency option, the PURO G4 is a perfect all-round oyster light.


## APPLICATIONS

Bedrooms, Lounge Room, Dining Area, Laundry, Hallways, Staircase, Walk-in Wardrobes, Garage, Education Facilities, Hotel Common Areas, Hotel Rooms, Storage Rooms, Temporary Installations

## DIMENSION DIAGRAMS

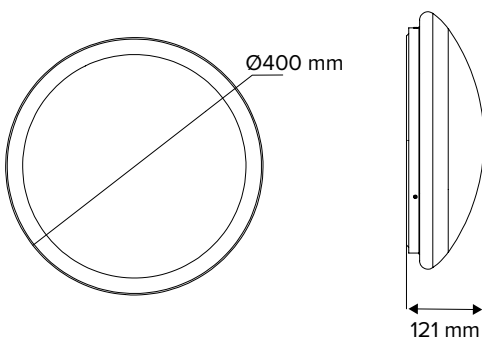

## PHOTOMETRIC DIAGRAM

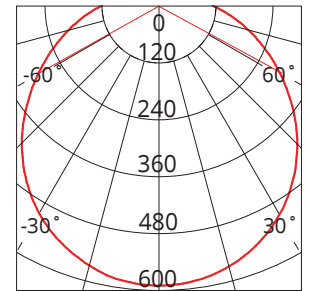

Unit: cd  
C0/180 120.8deg  
C90/270 120.9deg

Photometric diagram shown is for 4000K output.

## KEY INFORMATION

Power	25 W
Lumen Output	2000 / 2220 / 2070 lm
Mounting Type	Surface Mount
Dimming Type	Phase-Cut Dimmable (Trailing Edge, 10-100%)
Body Colour	White
IP Rating	IP54
IK Rating	Not Applicable
Operating Ambient Temp.	0 to 45°C
Connection Type	PA14 Terminals
Driver	Integral
Warranty	5 yrs

## PHOTOMETRIC

Efficacy	85 / 97 / 90 lm/W
CCT	3000K/4000K/5700K
CRI	> 80
SDCM	< 5
UGR	N/A
Beam Angle	120°
Flicker-Free	No
Projected Lifespan	>50,000hrs @ Ta 25°C (L70)

## ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Electrical Classification	Class I
Power Charging	2 W
Power Standby	3 W
Surge Protection	Overload / Short Circuit

## EMERGENCY INFORMATION

Test Type	Self-Test
Battery Type	LiFePO4 3.2V
Recharge Time	16 hrs
Discharge Time	1 5 hrs
Emergency Classification	C0:D40/C90:D40
Dimensions	Ø400 x 121 mm