



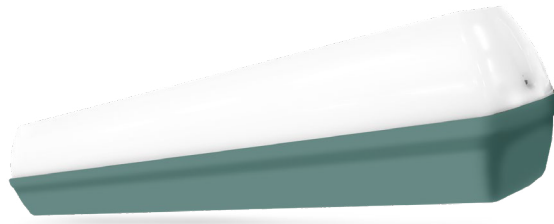


# SENTRY

SENTRY12W06-TRI

SAP CODE: 2001495



Photometric Diagram



Unit: cd  
 - C0/180 120.0deg  
 - C90/270 120.0deg

## 12 Watt Robust Tritone LED Batten

A versatile and robust weatherproof batten ideal for vandal prone and exposed areas.

### KEY INFORMATION

Lumen Output	1010 / 1225 / 1201lm
Input Power	12W
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP66
IK Rating	IK10
Rebate Scheme Approvals	N/A

### PHOTOMETRIC

LED	SMD
Efficacy	84 / 102 / 100lm/W
CCT	2700 / 4000 / 6500
CRI	>80
Beam Angle	120°

### ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	38VDC
Power Factor	>0.9
LED Input Current (nominal)	250mA
Useful life @Ta25° (L70)	36,000hr

### CONSTRUCTION

Housing	Polycarbonate
Lens	Polycarbonate Diffuser
Fixings/Hardware	Mounting Screws
Connection Type	Terminal Block
Total Weight	2kg
Dimensions	675 x 96 x 116mm
Operating Ambient Temp.	-15 to 45°C
Electrical Classification	Class 1