

TRIPROOF G2

TRIPROOF06-EM

SAP CODE: 2002551



Tried and trusted design.

Experience the power of TRIPROOF G2 LED battens, the ultimate weatherproof lighting solution engineered for demanding environments. These robust battens are built to withstand the toughest conditions, making them perfect for industrial settings including manufacturing facilities, as well as any outdoor area where reliability and durability are

APPLICATIONS

Kitchen / Food Prep, Balconies / Patios / Verandahs, Awnings, Garages, Shed, Carparks, Carports, Side of Building, Storage Facilities, Storage Rooms, Hangers, Manufacturing Facilities, Public Facilities, Temporary Installations, Cool Rooms, Outdoor Recreation, Indoor Recreation, General Industrial

DIMENSION DIAGRAMS

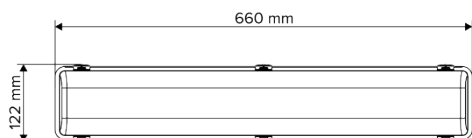


Disclaimer

NOTE1: CRI Value measured at 4K CCT

NOTE2: Plus 3W while battery recharge



PHOTOMETRIC DIAGRAM



Unit: cd

— C0/180,123.7

— C90/270,106.2

Photometric diagram shown is for 4000 K output.

KEY INFORMATION

Power	10 W 13 W 17 W 20 W
Lumen Output	1210 / 1296 / 1274 lm 1517 / 1646 / 1602 lm 1934 / 2133 / 2046 lm 2191 / 2453 / 2322 lm
Mounting Type	Surface Mount / Suspended
Dimming Type	Non-Dimmable
Fascia Colour	Grey
IP Rating	IP65
IK Rating	IK08
Operating Ambient Temp.	-0 to 45 °C
Connection Type	PA14 Terminals
Driver	Built-in
Warranty	3 yrs

PHOTOMETRIC

Efficacy	10 W: 121 / 129 / 127 lm/W 13 W: 117 / 127 / 123 lm/W 17 W: 114 / 125 / 120 lm/W 20 W: 110 / 123 / 116 lm/W
CCT	3000 / 4000 / 5000 K
CRI	> 85
SDCM	< 5
UGR	> 17
Beam Angle	120°
Flicker-Free	Yes
Projected Lifespan	> 50,000hrs @ Ta 45°C(L80)

ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Power Factor	> 0.9
Electrical Classification	Class I
Surge Protection	Overload / Short Circuit
Power Charging	3 W
Power Standby	1.6 W

EMERGENCY INFORMATION

Test Type	Self-Test
Battery Type	LiFePO4 3.2V
Recharge Time	16 hrs
Discharge Time	1.5 hrs
Emergency Classification	C0: D63 C90: D40