

HS-UX Unvented Under Sink Thermostatic Water Heater - Specification Sheet



Technical Details

Construction	ABS Plastic
Controls	Button controllable thermostat 10-70°C
Installation	Mains cold feed only Connection inlet - 15mm copper tube suitable for compression fittings Working pressure range: - Minimum 0.2 bar - Maximum 8.0 bar - Maximum Static Pressure - 8.0 bar
Element	1.5kW @ 220V
IP Rating	IPX4
Energy Rating	B
Cable	1.5m, 1.0mm ² , 3 core
Colour/Finish	White
Approvals	UKCA, CE
Warranty	2 Years Exchange
Country of Origin	UK
Manufacturer	Heatstore

Product Description


The HS-UX range of Unvented Under Sink Thermostatic Water Heaters provide instant hot water in small to medium-sized applications. Equipped with a 1.5kW heating element, this compact and efficient water heater delivers a reliable supply of hot water, making it a dependable choice for both residential and commercial applications.

Key Features

- Convenient bottom entry pipe connections, ideal for commercial applications
- Thermostatically controlled
- LCD digital display
- Uses standard taps and mixers
- Available in 10L, 15L and 25L
- Mounting brackets supplied
- EPR compliant
- Ideal for commercial and domestic applications
- 25L unit (HS25UX) supplied with pressure relief valve, check valve and expansion vessel

Dimensions

DIMENSION	10 LITRE	15 LITRE	25 LITRE
A	341mm	366mm	456mm
B	341mm	366mm	456mm
C	290mm	311mm	376mm
D	100mm	100mm	100mm
E	101mm	118mm	131mm
F	1/2"	1/2"	1/2"

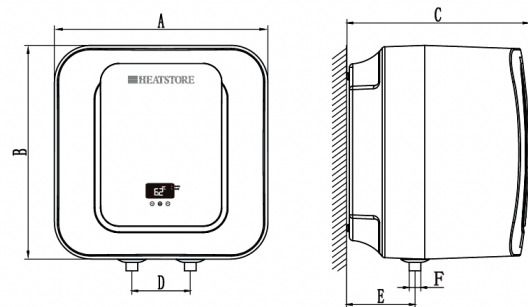

Model No.	Output kW	Height mm	Width mm (A)	Depth mm	Weight kg
HS10UX	1.5kW	341	341	290	8.6
HS15UX	1.5kW	366	366	311	9.8
HS25UX	1.5kW	456	456	376	13.8



Tel: **+44 (0)117 923 5375**
Email: enquiries@heatstore.co.uk