

# HSSRRH250RF Surface/Recessed Radiant Heater

## Specification Sheet



### Technical Details

|                   |                                                              |
|-------------------|--------------------------------------------------------------|
| Controls          | For use with RF controller range                             |
| Mounting Height   | Minimum height - 1800mm<br>Optimum height - 2500mm           |
| Element           | 0.25kW, 230-240V, 50Hz,<br>Single phase                      |
| Thermal Cut-out   | Automatic safety cut-out                                     |
| Colour/Finish     | White                                                        |
| IP Rating         | Not IP rated                                                 |
| Class             | Class I                                                      |
| Cable Length      | Supplied with a length of cable<br>and wireless receiver box |
| Approvals         | UKCA, CE                                                     |
| Warranty          | 2 Year service                                               |
| Country of Origin | UK                                                           |
| Manufacturer      | Heatstore                                                    |


### Product Description

The radiant ceiling tile heaters can be installed "invisibly" in a 600x600mm ceiling tile system or direct to a ceiling offering each office, showroom or corridor the maximum floor and wall space. With the integrated mounting system, the panels are easy to fit within any type of ceiling.

### Key Features

- Provides radiant heat
- Fits into 600mm x 600mm ceiling grid
- Can be recessed/surface mounted
- Wirelessly controlled
- Easy to install
- Quiet in operation
- For use with RF controller range
- Automatic safety cut-out
- Insulated to reduce heat transfer to the ceiling
- Optimum mounting height: 2.5m
- 250W rating
- Easy to clean
- Silent operation
- Finished in white

### Dimensions

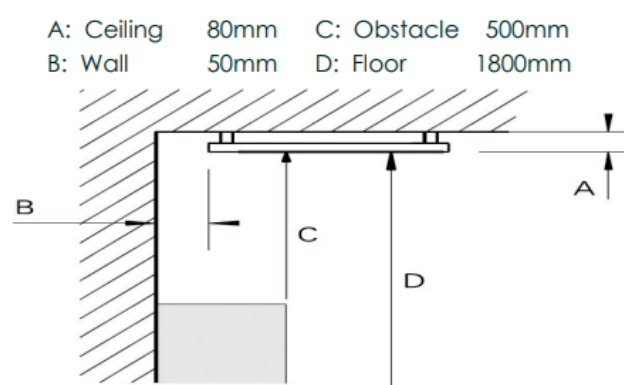

| Model       | Output (kW) | Height (mm) | Width (mm) | Depth (mm) | Weight (Kg) |
|-------------|-------------|-------------|------------|------------|-------------|
| HSSRRH250RF | 0.25        | 590         | 590        | 40         | 4.7         |



**HEATSTORE**

Tel: **+44 (0)117 923 5375**

Email: [enquiries@heatstore.co.uk](mailto:enquiries@heatstore.co.uk)