


HSUFFOL - HDF Overlay Boards Specification Sheet

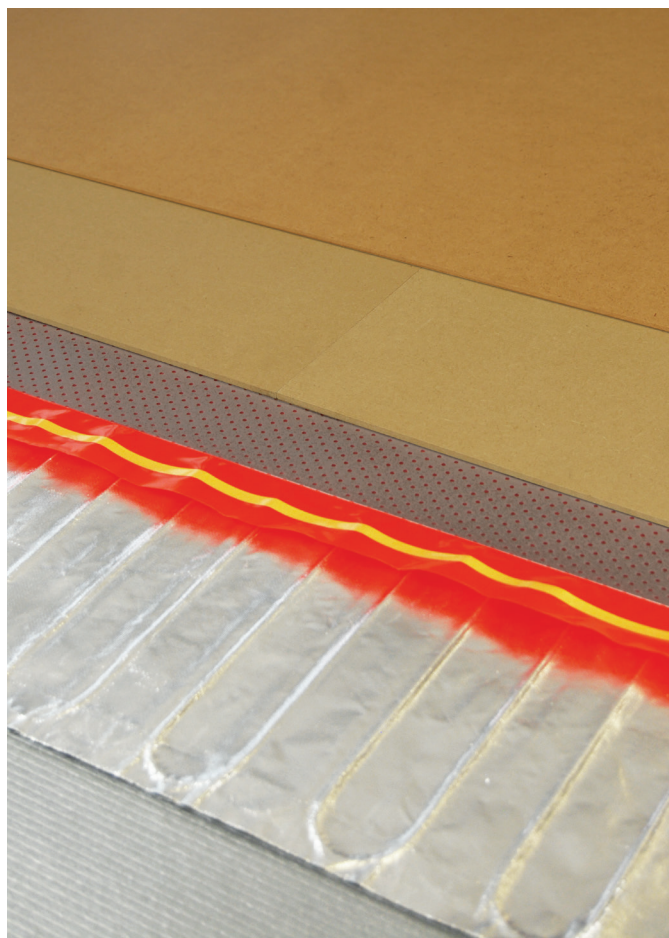

Technical Details

Construction	HDF & adhesive
Total Thickness/Tolerance	7mm (+/- 0.2mm)
Top Board Thickness	4mm
Base Board Thickness	3mm
Board Size	600mm x 1200mm
Density	770 kg/m ³
Colour	Natural
Bending Strength	>40 kg/cm ²
Fire Class	B2 DIN 4102
Humidity	4-10%
Swelling after 24hr in water	Max <40%
Thermal Resistance (R)	0.047 m ² KW ⁻¹
Formaldehyde Resistance	E - I
Country Of Origin	UK
Manufacturer	Heatstore

Key Features

Any resilient floor coverings such as carpet, vinyl, linoleum, rubber and cork can be fitted directly on to the surface of HDF Overlay Board.
 Low heat resistance.
 Made from high quality HDF.
 Coated with pressure activated contact adhesive.

Product Description

Heatstore HDF Overlay Boards are composed of high quality HDF 3mm baseboards and 4mm top boards.

Each board is coated with a pressure activated contact adhesive to give a strong permanent full surface bond.

Use Heatstore HDF Overlay Boards over floating foil heating systems before installing carpet or vinyl floor finishes.

Heatstore HDF Overlay Boards have a low heat resistance and are designed to let warmth from underfloor heating up into the room.

Vinyl floors can be adhered to the overlay board.

Dimensions

Model No:	Total Boards	Length mm	Width mm	Depth mm
HSUFFOL	8	600	1200	4 (top)
	4			3 (base)

Product Range

Model No:	Total Boards QTY	4mm Boards QTY	3mm Boards QTY	Coverage m ²	Barcode
HSUFFOL	8	4	4	2.88	5020669519885



Tel: **+44 (0)117 923 5375**

Email: enquiries@heatstore.co.uk