



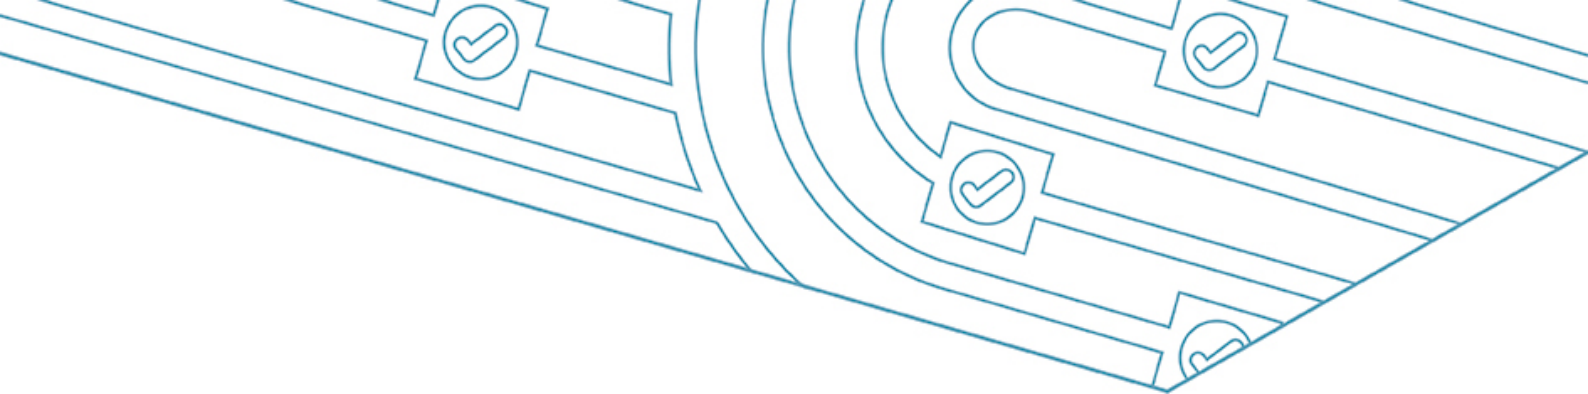

Debox®

Range: Debox®

Order Code: EJB-DBX-10-03-05-WW (Debox SL)

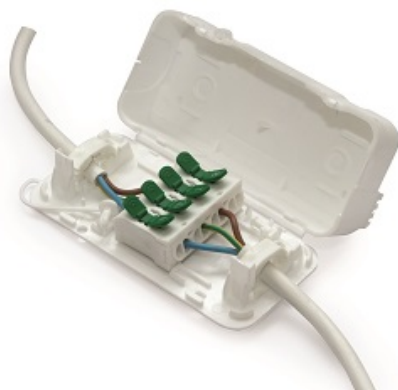

DESCRIPTION

Now featuring a new easier-to-use, Double Lever Terminal Block. DEBOX® SL is supplied with the new screwless terminal block, giving a maintenance-free connection. DEBOX SL is a registered design, featuring many new innovative concepts to speed up product assembly without compromising quality. This safe, fast reliable 100% tool-less assembly is also supplied complete with 4 Pole 16amp, 0.5-2.5mm connector block. It is capable of accommodating 2, 3 and 4 conductors in round or flat profile cable for ring main lighting. Cable strip length: 9-11mm. Cable size stranded/solid; 0.08-2.4mm, AWG 28-12. LED lighting or power.

DEBOX® FEATURES

- 100% tool-less assembly saving time and money
- Maintenance free
- Supplied complete with UL and VDE 16A 4 Pole Screwless Terminal Block with Multi Conductor access on input and output (2 x 1.5mm²)
- Manufactured from Flame Retardant Polypropylene
- External Fixing Lugs
- Spare Butterfly Clip included
- IP20 Protected
- Conforms to EN60598-1 (Glow wire test 650°C) and EN60670-22 (Pull Test)
- Reg. Design 002553735
- Cable Strip Length for connector: 9-11mm
- Cable Size Stranded/Solid: 0.08-2.4mm, AWG 28-12

Subject to technical modification without notice.

Typographical and other errors do not justify claim for damages.

MAKING THE **RIGHT** CONNECTIONS

WWW.HYLEC-APL.COM | SALES@HYLEC-APL.COM | 01933 234400




SPECIFICATION

Number of Poles	4
Body Material	Polypropylene
Colour	White
Min Conductor Size (Sq mm)	0.5
Max Conductor Size (Sq mm)	2.5
Max Current (A)	16
Height (mm)	28.5
Width (mm)	50
Length (mm)	97
Min Temperature Rating °C	-20
Max Temperature Rating °C	85
Comments	Debox SL is available with 2 connectors, with Green or White levers. The information here is for the Green lever connector. For full information, see p.3 of the datasheet



ADDITIONAL INFORMATION

White Lever Connector



Poles: 4-Poles
Housing Material: Polypropylene
Contact Material: Plated Brass/Steel Spring
Voltage : 16A (up to 1.5mm²) / 24A (up to 2.5mm²)
Flammability Rating: UV94V-2
Cable Min/Max: Holes A/B 0.5 – 2.5mm, Hole C 0.5 – 0.75mm
Strip Length: 8-10mm

Green Lever Connector

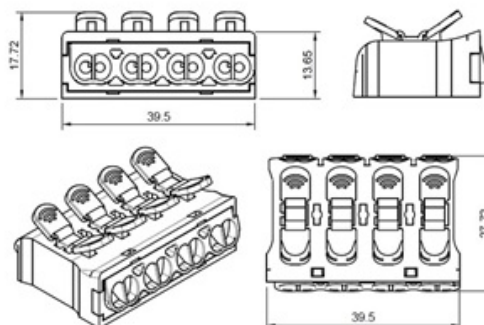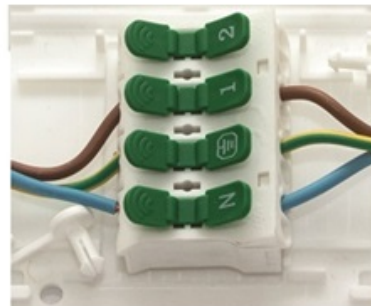

Poles: 4-Poles
Housing Material: Polypropylene
Contact Material: Plated Brass/Steel Spring
Voltage : 16A
Flammability Rating: UV94V-2
Cable Min/Max: 0.8 – 2.5mm
Strip Length: 9-11mm

Wiring Holes (a)+(b)

