


Part number

# KI 3263 EB6



interlocked switched socket-outlet, EB6 series,  
2 poles + PE, 6 h (blue), 32 A, 200 ÷ 250 V,  
without fuse-carrier

#### Product description

<b>Product type</b>	interlocked switched socket-outlet
<b>Series</b>	KI...EB6
<b>N. of poles</b>	2 poles + 
<b>Clock position</b>	6
<b>Size</b>	114x228 fixing plates FC xx41 TB
<b>Cable entry</b>	M25
<b>Specification</b>	without fuse-carrier

#### Technical data

<b>Current</b>	32 A
<b>Voltage</b>	200 ÷ 250 V
<b>IP degree of protection</b>	IP66

#### Further technical details

<b>Weight</b>	960,00 g
<b>Operating temperature range (min, max)</b>	-40°C ... +125°C

#### Approvals / Standards

<b>Reference standard</b>	EN 60309-1 and -2
---------------------------	-------------------

#### General ordering information

<b>EAN13 code</b>	8015747192606
-------------------	---------------

#### Packaging Information

<b>Packaging length</b>	560,00 mm
<b>Packaging height</b>	330,00 mm
<b>Packaging width</b>	270,00 mm
<b>Packaging weight</b>	9,53 kg
<b>Packaging volume</b>	49,90 dm <sup>3</sup>
<b>Packaging description</b>	Carton box
<b>Packaging quantity</b>	8 Pcs
<b>Packaging EAN code</b>	8015747196581
<b>Sub-packaging length</b>	270,00 mm
<b>Sub-packaging height</b>	125,00 mm
<b>Sub-packaging width</b>	120,00 mm
<b>Sub-packaging weight</b>	1,19 kg
<b>Sub-packaging volume</b>	4,05 dm <sup>3</sup>
<b>Sub-packaging description</b>	Carton box
<b>Sub-packaging quantity</b>	1 Pcs
<b>Sub-packaging EAN barcode</b>	8015747192743




Catalogue drawings


**KI .. EB6 interlocked socket-outlets without fuse carrier**

- Compliant with EN 60309-1, 2 e 4
- Enclosures and inserts in insulating self-extinguishing thermoplastic material, RAL 7035 grey
- 16A and 32A types with spring lid
- Factory installed internal wiring
- Cable entry with threaded metric opening
- "ZG" series switch, with 32A rating
- Mechanical interlock that prevents:
  - the switch from being turned on without the plug inserted and the plug from being removed while the switch is on
- Lockable switch
- Inspection panel, openable only when the switch is off.

**16A**  
IP66 degree of protection




**32A**  
IP66 degree of protection



Poles	Frequency Hz	Voltage V	Earthing contact position n	Part No.	Colour	Part No.	Colour
2P+Ⓢ	50 and 60	100 + 130	4	KI 1643 EB6	Yellow	KI 3243 EB6	Yellow
	50 and 60	200 + 250	6	KI 1663 EB6	Blue	KI 3263 EB6	Blue
	50 and 60	380 + 415	9	KI 1693 EB6	Red	KI 3293 EB6	Red
	50 and 60	480 + 500	7	KI 1673 EB6	Black	KI 3273 EB6	Black
	50 and 60	ins. transformer	12	KI 16123 EB6	a.v.	KI 32123 EB6	a.v.
	> 300 + 500	> 50	2	KI 1623 EB6	*	KI 3223 EB6	*
	c.c.	> 50 + 250	3	KI 1633 EB6	a.v.	KI 3233 EB6	a.v.
3P+Ⓢ	50 and 60	100 + 130	4	KI 1644 EB6	Yellow	KI 3244 EB6	Yellow
	50 and 60	200 + 250	9	KI 1694 EB6	Blue	KI 3294 EB6	Blue
	50 and 60	380 + 415	6	KI 1664 EB6	Red	KI 3264 EB6	Red
	60	440 + 460	11	KI 16114 EB6	Black	KI 32114 EB6	Black
	50 and 60	480 + 500	7	KI 1674 EB6	Black	KI 3274 EB6	Black
	50	380	3	KI 1634 EB6	Red	KI 3234 EB6	Red
	60	440	3	KI 1634 EB6	Red	KI 3234 EB6	Red
100 + 300	> 50	10	KI 16104 EB6	*	KI 32104 EB6	*	
> 300 + 500	> 50	2	KI 1624 EB6	*	KI 3224 EB6	*	
3P+N+Ⓢ	50 and 60	57/100 + 75/130	4	KI 1645 EB6	Yellow	KI 3245 EB6	Yellow
	50 and 60	120/208 + 144/250	9	KI 1695 EB6	Blue	KI 3295 EB6	Blue
	50 and 60	200/346 + 240/415	6	KI 1665 EB6	Red	KI 3265 EB6	Red
	50 and 60	277/480 + 288/500	7	KI 1675 EB6	Black	KI 3275 EB6	Black
	60	250/440 + 265/460	11	KI 16115 EB6	Black	KI 32115 EB6	Black
	50	220/380	3	KI 1635 EB6	Red	KI 3235 EB6	Red
	60	250/440	3	KI 1635 EB6	Red	KI 3235 EB6	Red
> 300 + 500	> 50	2	KI 1625 EB6	*	KI 3225 EB6	*	

**Legend**  
A.V. = Colour according to voltage  
\*) Green may be used together with the colour of the operating range for frequencies above 60 Hz and up to a maximum of 500 Hz

**Dimensions in mm**

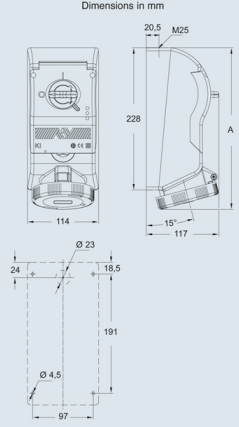

poles	A
2P+Ⓢ	252
3P+Ⓢ	252
3P+N+Ⓢ	252
2P+Ⓢ	260
3P+Ⓢ	260
3P+N+Ⓢ	260

Dimensions indicated are not binding and may be changed without prior notice.

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1, 2 e 4
- Enclosures and inserts in insulating self-extinguishing thermoplastic material, RAL 7035 grey
- 16A and 32A types with spring lid
- Factory installed internal wiring

- Cable entry with threaded metric opening
- "ZG" series switch, with 32A rating
- Mechanical interlock that prevents: the switch from being turned on without the plug inserted and the plug from being removed while the switch is on
- Lockable switch
- Inspection panel, openable only when the switch is off.