

Part number

PE 3265 PV



Mobile socket outlet, PLUSO series, 3 poles + N + PE, 6 h (red), 32 A, 380 ÷ 415 V

Product description

Product type	Socket Mobile
Series	PE...PV, PLUSO
Connection type	Screw terminal connection
N. of poles	3 poles + N + $\oplus$
Clock position	6

Technical data

Current	32 A
Voltage	380 ÷ 415 V
IP degree of protection	IP44

Further technical details

Weight	275,00 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 7035 grey, RAL 3000 red
---------------	-----------------------------

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747067515
-------------------	---------------

Packaging Information

Packaging length	275,00 mm
Packaging height	230,00 mm
Packaging width	275,00 mm
Packaging weight	3,02 kg
Packaging volume	17,39 dm ³

Packaging description	Carton box
------------------------------	------------

Packaging quantity	10 Pcs
---------------------------	--------

Packaging EAN code	8015747067522
---------------------------	---------------


Part number

PE 3265 PV



Catalogue drawings

(16 / 32A) PE ... PV

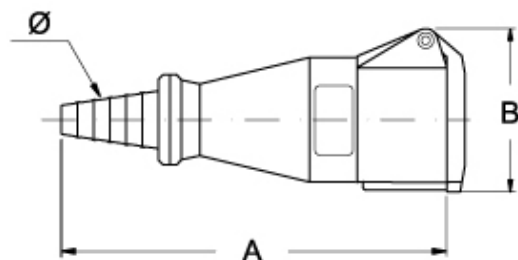

PE...PV	A	B	Ø min	Ø max
16A 2P+⊕	157,5	68	7	17
3P+⊕	164,5	76	7	17
3P+N+⊕	183,5	83	9	22
32A 2P+⊕	200,5	87	9	22
3P+⊕	200,5	87	9	22
3P+N+⊕	200,5	91	9	22

Notes

Dimensions shown in mm are not binding and may be changed without notice.