


Part number

PES 1664 SV



mobile plug, PLUSO series, SQUICH® quick connection, 3 poles + PE, 6 h (red), 16 A, 380 ÷ 415 V, straight

Product description

Product type	plug mobile
Series	PES....SV, PLUSO
Connection type	SQUICH® quick connection
N. of poles	3 poles + 
Clock position	6
Specification	straight

Technical data

Current	16 A
Voltage	380 ÷ 415 V
IP degree of protection	IP44

Further technical details

Weight	130,00 g
Operating temperature range (min, max)	-40°C ... +125°C

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747113113
-------------------	---------------

Packaging Information


Packaging length	400,00 mm
Packaging height	410,00 mm
Packaging width	400,00 mm
Packaging weight	13,00 kg
Packaging volume	65,60 dm ³
Packaging description	Carton box
Packaging quantity	100 Pcs
Packaging EAN code	8015747128797

Part number

PES 1664 SV



Catalogue drawings

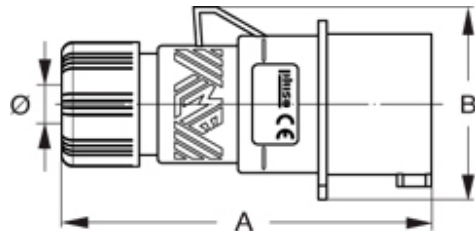

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- PES...SV types (IP44), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure
- PESW...SV types (IP66/IP67), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure, locking ring with gasket colour coded according to operating voltage
- Terminals with retained screws
- IP44 and IP66/IP67 degrees of protection (EN 60529)

