
Part number

PEW 1664 SV

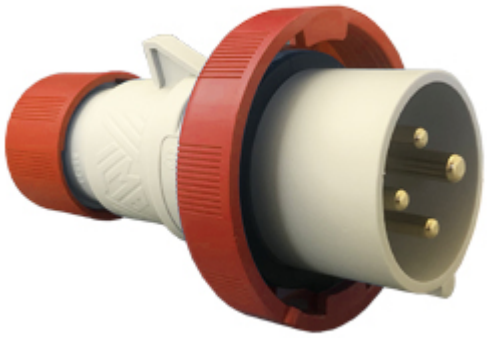

Mobile plug, PLUSO series, 3 poles + PE, 6 h (red), 16 A, 380 ÷ 415 V, straight

Product description	
Product type	Plug Mobile
Series	PEW...SV, PLUSO
Connection type	Screw terminal connection
N. of poles	3 poles + ⏚
Clock position	6
Specification	Straight
Technical data	
Current	16 A
Voltage	380 ÷ 415 V
IP degree of protection	IP67
Further technical details	
Weight	150,00 g
Operating temperature range (min, max)	-25°C ... +40°C


Material properties	
Colour	RAL 7035 grey, RAL 3000 red
Approvals / Standards	
Reference standard	EN 60309-1 and -2
General ordering information	
EAN13 code	8015747072953
Packaging Information	
Packaging length	330,00 mm
Packaging height	175,00 mm
Packaging width	295,00 mm
Packaging weight	3,60 kg
Packaging volume	17,04 dm^3
Packaging description	Carton box
Packaging quantity	20 Pcs
Packaging EAN code	8015747072960

Part number

PEW 1664 SV

Catalogue drawings

(16 / 32A) PEW ... SV

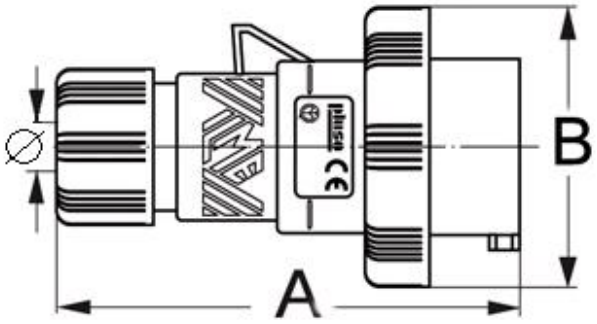

PEW...SV		A	B	ø min	ø max
16A	2P+⏚	129	70	7	16
	3P+⏚	129	77	7	16
	3P+N+⏚	129	86	8	24
32A	2P+⏚	150	92	8	24
	3P+⏚	150	92	8	24
	3P+N+⏚	150	100	8	24

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- PE...SV types 16A and 32A (IP44), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure
- PEW...SV types 16A and 32A (IP66/IP67), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure, locking ring with gasket colour coded according to operating voltage
- PEW...SV types 63A and 125A (IP67), entry with cable gland, RAL 7035 grey enclosure, locking ring with gasket colour coded according to operating voltage
- PEW...SV types 63Aand 125A (IP67), cable anchoring collar incorporated in the insert
- SIP version with phase inverter (3P+N+E, h6), 16A and 32A
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts standard on 63A and 125A (on 16A and 32A only version PHW...SV)