

Part number

# PEW 6365 PI



Flush-mounting socket outlet, PLUSO series, 3 poles + N + PE, 6 h (red), 63 A, 380 ÷ 415 V, inclined

## Product description

|                        |                                                                                                  |
|------------------------|--------------------------------------------------------------------------------------------------|
| <b>Product type</b>    | Socket<br>Flush-mounting                                                                         |
| <b>Series</b>          | PEW...PI, PLUSO                                                                                  |
| <b>Connection type</b> | Screw terminal connection                                                                        |
| <b>N. of poles</b>     | 3 poles + N +  |
| <b>Clock position</b>  | 6                                                                                                |
| <b>Specification</b>   | Inclined                                                                                         |

## Technical data

|                                |             |
|--------------------------------|-------------|
| <b>Current</b>                 | 63 A        |
| <b>Voltage</b>                 | 380 ÷ 415 V |
| <b>IP degree of protection</b> | IP67        |

## Further technical details

|                                               |                 |
|-----------------------------------------------|-----------------|
| <b>Weight</b>                                 | 724,00 g        |
| <b>Operating temperature range (min, max)</b> | -25°C ... +40°C |

## Material properties

|               |                             |
|---------------|-----------------------------|
| <b>Colour</b> | RAL 7035 grey, RAL 3000 red |
|---------------|-----------------------------|

## Approvals / Standards

|                           |                   |
|---------------------------|-------------------|
| <b>Reference standard</b> | EN 60309-1 and -2 |
|---------------------------|-------------------|

## General ordering information

|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747077590 |
|-------------------|---------------|

## Packaging Information

|                              |                      |
|------------------------------|----------------------|
| <b>Packaging length</b>      | 290,00 mm            |
| <b>Packaging height</b>      | 140,00 mm            |
| <b>Packaging width</b>       | 215,00 mm            |
| <b>Packaging weight</b>      | 3,11 kg              |
| <b>Packaging volume</b>      | 8,73 dm <sup>3</sup> |
| <b>Packaging description</b> | Carton box           |
| <b>Packaging quantity</b>    | 4 Pcs                |
| <b>Packaging EAN code</b>    | 8015747077606        |


Part number

# PEW 6365 PI



Catalogue drawings

( 63 /125A) PEW ... PI

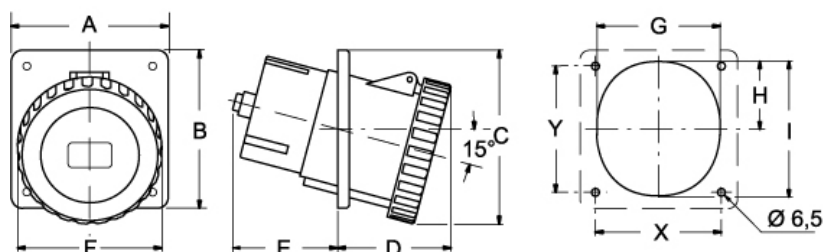

| PEW ... PI       | A   | B   | C   | D  | E  | F   | G   | H  | I   | X   | Y   |
|------------------|-----|-----|-----|----|----|-----|-----|----|-----|-----|-----|
| <b>63A</b> 2P+⊕  | 100 | 107 | 124 | 84 | 55 | 107 | 82  | 45 | 94  | 77  | 85  |
| 3P+⊕             | 100 | 107 | 124 | 84 | 55 | 107 | 82  | 45 | 94  | 77  | 85  |
| 3P+N+⊕           | 100 | 107 | 124 | 84 | 55 | 107 | 82  | 45 | 94  | 77  | 85  |
| <b>125A</b> 2P+⊕ | 130 | 130 | 143 | 94 | 87 | 119 | 102 | 56 | 112 | 104 | 104 |
| 3P+⊕             | 130 | 130 | 143 | 94 | 87 | 119 | 102 | 56 | 112 | 104 | 104 |
| 3P+N+⊕           | 130 | 130 | 143 | 94 | 87 | 119 | 102 | 56 | 112 | 104 | 104 |

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- Flange with anti-ageing gasket
- PE...PI types (IP44), spring lid
- PEW...PI types (IP67), spring lid with locking ring and gasket
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- IP44 and IP67 degrees of protection (EN 60529)