Part number

TM 1664 SP



Interlocked switched socket-outlet, TM series, 3 poles + PE, 6 h (red), 16 A, 380 ÷ 415 V, without fuse-carrier, with base box


Product description	
Product type	Interlocked switched socket-outlet
Series	TM..SP/KSP
N. of poles	3 poles + ⏚
Clock position	6
Size	115 x 450 x 18 mm
Specification	Without fuse-carrier With base box
Technical data	
Current	16 A
Voltage	380 ÷ 415 V
IP degree of protection	IP66/IP67
Further technical details	
Weight	1.330,00 g
Operating temperature range (min, max)	-25°C ... +40°C
UL 94 flammability rating	V-2
IK rating (impact degree of protection)	IK10


Material properties	
Colour	RAL 7012 grey, RAL 3000 red
Approvals / Standards	
Reference standard	EN 60309-1 and -2
General ordering information	
EAN13 code	8015747100427
Packaging Information	
Packaging weight	11,97 kg
Packaging volume	52,36 dm³
Packaging description	Carton box
Packaging quantity	9 Pcs
Packaging EAN code	8015747103329
Sub-packaging weight	1,33 kg
Sub-packaging description	Plastic packaging
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747103336

Part number

TM 1664 SP

Catalogue drawings

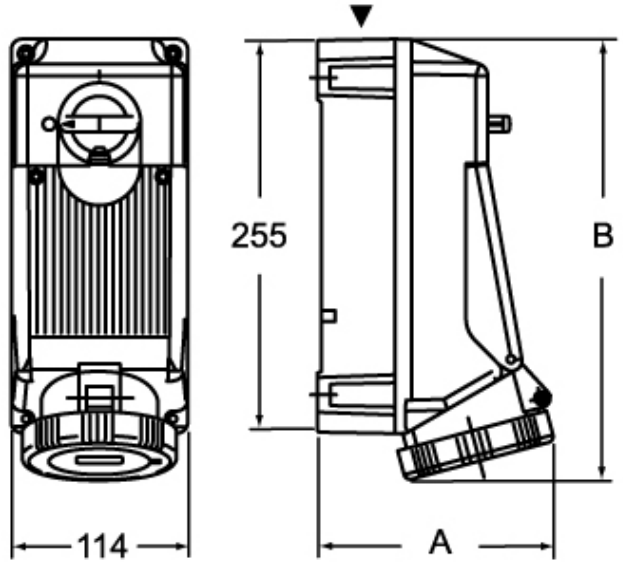

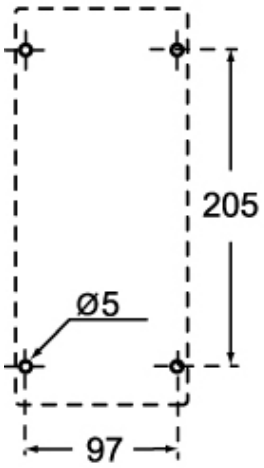

	A	B
2P+⏚	133	276
3P+⏚	135	276
3P+N+⏚	140	277

Notes

Dimensions shown in mm are not binding and may be changed without notice.